




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 29/06</b>		<b>A2</b>	(11) International Publication Number: <b>WO 96/31040</b>
			(43) International Publication Date: 3 October 1996 (03.10.96)
(21) International Application Number: <b>PCT/GB96/00751</b>		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 March 1996 (29.03.96)			
(30) Priority Data: 9506759.1                      31 March 1995 (31.03.95)                      GB			
(71) Applicant (for all designated States except US): INTERNATIONAL MOBILE SATELLITE ORGANIZATION [-/GB]; 99 City Road, London EC1Y 1AX (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): FELDMAN, Howard, Ray [US/GB]; 82 Alicia Gardens, Kenton, Middlesex HA3 8JE (GB). KAWAI, Nobuyuki [JP/GB]; 19 Willow Way, Finchley, London N3 2PL (GB). SMITH, Richard, Douglas, Lane [GB/GB]; 380 Pickersleigh Road, Malvern, Worcestershire WR14 2QH (GB). REMAEL, François-Arnaud [FR/FR]; 2, rue Saint Yves, F-22300 Lannion (FR).			
(74) Agents: MUSKER, David, C. et al.; R.G.C. Jenkins & Co., 26 Caxton Street, London SW1H 0RJ (GB).		Published Without international search report and to be republished upon receipt of that report.	

(54) Title: DATA COMMUNICATION METHOD AND APPARATUS

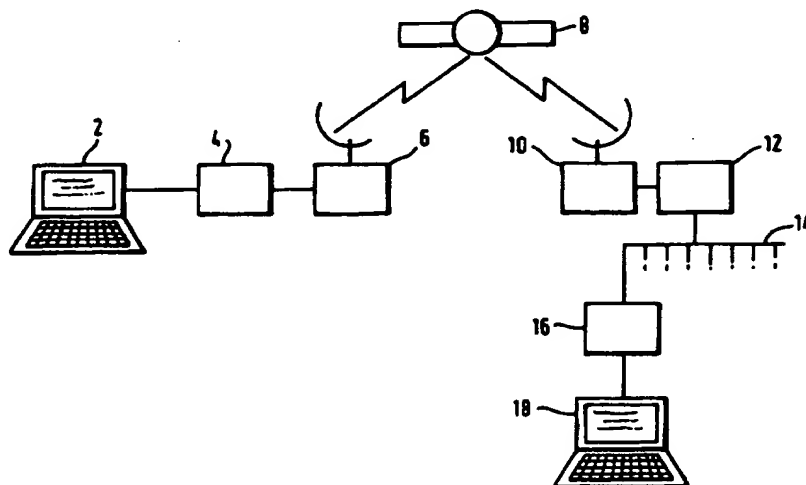

## (57) Abstract

An interface (4; 12) between a data terminal (2; 18) and a digital communications link (6, 8, 10) implements protocols and frame formats designed to reduce delays in a data communication with a remote terminal (18; 2). The interface (4; 12) overcomes the need to send or receive an HDLC SABME or UA control signal, and allows data to be sent over the digital communications link (6, 8, 10) as soon as the communication parameters are established. In a non-ARQ (error correction) mode, the interface (4; 12) sends control signals and data over the communications link (6, 8, 10) in frames subdivided into many small subframes of fixed length, each subframe having a length code. The interface (12), when arranged for connection to the data terminal (18) through a telephone network (14), encodes call progress signals from the telephone network (14) for sending over the digital communications link (6, 8, 10). The interface (4; 12) encodes and decodes interrupt signals for sending between the data terminal (2; 18) and the digital communications link (6, 8, 10) when an interrupt signal is detected.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

DATA COMMUNICATION METHOD AND APPARATUSTechnical Field

The present invention relates to a data communication method and apparatus for use in radio frequency communications and in particular, but not exclusively, to an interface for connecting a data terminal, either directly or indirectly, to a digital radio frequency communications link.

Background Art

One example of a radio-frequency communications link for use in connecting data terminal equipment (DTE) is an asynchronous data service proposed for the INMARSAT-B (TM) or INMARSAT-M (TM) satellite communications system, as described for example in Chapters 12 and 14 of "Satellite Communications: Principles and Applications" by Calcutt and Tetley, 1st edition, published by Edward Arnold.

The overall layout of the satellite communications system, when used for data communications, is shown in Figure 1. A mobile DTE 2 is connected via an RS232C interface to a modem interface unit (MIU) 4. The MIU 4 simulates a Hayes - compatible modem and is able to decode Hayes-type commands from the mobile DTE 2, so that off-the-shelf communications software may be used in the mobile DTE 2. The MIU 4 does not perform modulation or demodulation in this case, since it is not connected to an analog line. Instead, the MIU 4 provides an interface to a mobile earth station (MES) 6 which allows communication via a satellite 8 to a fixed or land earth station (LES) 10. The LES 10 is connected to an LES MIU 12 which interfaces the satellite link to a public switched telephone network (PSTN) 14 and therefore functions as a modem to convert analog signals on the PSTN 14 to digital signals on the satellite link, and vice versa. A fixed DTE 18 is connected to the PSTN 14 through a modem 16 of standard type. Alternatively, the LES MIU 12 may be connected to the fixed DTE via an ISDN and an ISDN adapter, or via another type of network allowing data to be sent in another format.

Figure 2 shows the MES MIU 4 and the MES 6 in greater detail. The MES MIU 4 comprises a DTE interface 20, which provides an RS232 physical interface and emulates an AT.PCCA type modem, i.e. it complies with the minimum functional specification for data transmission systems published by the Portable Computer and Communications Association (PCCA), including the use of the AT command set and responses.

Data received by the DTE interface 20 is sent to a buffer 22, which is in turn connected to an MES interface 24. The MES interface 24 implements, in ARQ (automatic repeat request) mode, a variant of the HDLC (High Level Data Link Control) protocol, as defined in ISO recommendations ISO/IEC 3309, ISO/IEC 4335: 1993 and ISO/IEC 7809: 1993. The particular version employed is ISO HDLC BAC 3.2, 4, 8, 10, 12 as defined in ISO 7809: 1993 (synchronous, two-way simultaneous, duplex, non-switched). A controller 26 controls the operation of the interfaces 20 and 24 and the flow of data through the buffer 22.

The MES includes an RF modulator/demodulator 27, connected to an antenna 28, for RF modulating the output of the MES interface 24 and transmitting the output through the antenna 28 to the satellite 8, and for RF demodulating RF signals received from the satellite 8 through the antenna 28 and sending the demodulated signals to the MES interface 24. The MES 6 also includes access control and signalling equipment (ACSE) 30, for setting up and clearing the satellite link, which exchanges data with the controller 26 of the mobile MIU 4.

The MES ACSE 30 communicates with a network control station (NCS) which allocates communications channels and supervises communications traffic through the satellite 8 and communicates with further ACSE at the LES.

The mobile MIU 4, MES 6 and ACSE 30 may be integrated in a mobile unit and the antenna 28 may be integrated or connected externally with the mobile unit.

Figure 3 shows the LES 10 and the LES MIU 12 in greater detail. The LES MIU 12 includes a modem 31 for demodulating

analog signals from the PSTN 14 and modulating digital signals for the PSTN 14, and a modem interface 32 which supports modem protocols such as V.42 error correction, for communication with the modem 16. If the PSTN 14 is a digital network, a  
5 suitable interface is used instead of the modem 30.

The modem interface 32 is connected through a buffer 34 to an LES interface 36, which implements protocols compatible with the MES interface 24, so that data can be exchanged between the LES MIU 12 and the MES MIU 4. A controller 38  
10 supervises the operation of the modem interface 32, buffer 34 and LES interface 36. The LES interface 36 is connected to an RF modulator/demodulator 40 which modulates signals for transmission to the satellite 8 through an antenna 42, and demodulates signals received from the satellite 8 through the  
15 antenna 42. Call set-up and clearing are controlled by an LES ACSE 44 within the LES 10 which exchanges signals with the LES MIU 12, the MES ACSE 30, and the network control station (NCS).

#### Example

20 An example of data communication between the mobile DTE 2 and the fixed DTE 18 using the INMARSAT-M (TM) system will now be described with reference to Figure 4.

#### Call set-up

In this example, the mobile DTE 2 initiates a call by  
25 sending the code ATD (dial) 46 to the MES MIU 4, which sends a dialling indication 48 to the MES ACSE 30. A call is then set up during the period 50 by exchanging call set-up signals between the MES ACSE 30, the LES ACSE 44 and the network control station. When the call has been set up on the  
30 satellite link, a dialling signal 52 is sent from the LES ACSE 44 to the LES MIU 12, which dials the requested number using a dialling sequence 54 over the PSTN 14. The modem 16 sends a ringing indication 56 to the fixed DTE 18, and the PSTN 14 sends a ringing tone 58 to the LES MIU 12. The LES MIU 12  
35 sends a Ringing line control message (LCM) 60 to the MES MIU 4, which in turn sends a ringing indication 62 to the mobile DTE 2 to indicate that the call has been successfully set up.

A line control message (LCM) typically requires a response from the MIU that receives it. The response may either be another LCM or an echo of the original LCM, if no response is available.

## 5 Training

The parameters of the call must now be established. The MES MIU 4 sends an establish line control message (LCM) 64, which requests options to be supported, to the LES MIU 12. The parameters requested in the Establish LCM 64 are:

- 10 (i) satellite/PSTN ARQ or non-ARQ (Automatic Repeat Request)
- (ii) Maximum data rate
- (iii) 7 or 8 bit data
- (iv) 1 or 2 stop bits
- 15 (v) Odd, even or no parity

Options (iii) to (v) relate to the data format to be used in the link between the mobile DTE 2 and the MES MIU 4 and between the LES MIU 12 and the fixed DTE 18. ARQ mode can be set independently in (i) for the satellite link and PSTN  
20 link.

The fixed DTE 18 responds to the ringing indication 56 with an ATA (answer) signal 66. The modem 16 sends an answer signal 68 to the LES MIU 12, which causes a connect signal 70 to be sent to the LES ACSE 44, the MES ACSE 30 and the MES MIU  
25 4.

Next, the LES MIU 12 attempts to establish a reliable data rate for communication with the fixed DTE 18 by means of a training sequence 76. For example, the LES MIU 12 sends a test signal at 2400 bit/s and detects whether the test signal  
30 is confirmed by the modem 16. If it is not confirmed, a test signal is sent at 1200 bit/s and the LES MIU 12 awaits confirmation from the modem 16. If no confirmation is received, training is unsuccessful and the call cannot proceed.

35 If training is successful, the LES MIU 12 sends to the MES MIU 4 a Connect LCM 80, which indicates the data rate at which training was successful and confirms satellite/PSTN

ARQ/non-ARQ modes, and the modem 16 sends a connect indication 78 to the fixed DTE 18. In response to the Connect LCM 80, the MES MIU 4 sends a connect indication 82, including the call parameters, to the mobile DTE 2.

- 5 Then the LES MIU 12 sends an HDLC SABME (Set Asynchronous Balanced Mode Extended) signal 84, which is required under the HDLC protocol to establish HDLC Asynchronous Balanced Mode, to the MES MIU 4. The MES MIU 4 responds with an HDLC UA (Unnumbered Acknowledge) signal 86, to indicate that the HDLC  
10 SABME signal 84 has been received and data transfer may now take place.

#### Data Transfer

- Any data which has already been sent by the mobile DTE 2 in response to the connect indication 82 is buffered in the  
15 MES MIU 4 until the HDLC UA signal 86 has been sent, and any data already sent by the fixed DTE 18 is buffered in the LES MIU 12 until the HDLC UA signal 86 has been received. Data transfer 88 occurs between the MES DTE 2 and the MES MIU 4 through the RS232 link. Data transfer 90 occurs between the  
20 MES MIU 4 and the LES MIU 12 through the satellite 8 as 8-bit data, with start, stop and parity bits having been removed by the local MIU.

- In 7-bit mode, an extra zero is inserted to fill out each byte to 8 bits over the satellite link, and is removed by the  
25 MIU which receives the data.

Data 92 is sent over the PSTN 14 and corresponding data 94 is exchanged between the modem 16 and the fixed DTE 18.

- Data is buffered in the MIUs to accommodate differences in data rates and non-synchronous operation between the MES  
30 DTE 2 and the fixed DTE 18.

#### Call Clearing

- At the end of a data call, the MES DTE 2 sends an ATH (Hang Up) signal 96 to the MES MIU 4, which in turn sends a call clearing signal 98 to the MES ACSE 30. The MES ACSE 30  
35 signals channel release 100 to the LES 10 and the channel is cleared (not shown) by the network control station. A clearing indication 102 is sent by the LES ACSE 44 to the LES

MIU 12, which sends a call-clearing indication 104 to the modem 16. Finally, the modem 16 sends a clearing indication 106 to the fixed DTE, and goes on-hook.

#### Fixed Originated Calls

5 In a call originated by the fixed DTE 18, as shown in Figure 5, the flow of signals shown in Figure 4 is substantially reversed. Corresponding reversed signals are given the same references as in Figure 4, but are dashed. Corresponding non-reversed signals are given the same  
10 references as in Figure 4.

#### Call Set-up

Fixed DTE 18 initiates the call by sending an ATD signal 46' to the modem 16, which sets up a call at 108 to the LES MIU 12. A call set up indication 48' is sent from the LES MIU  
15 12 to the LES ACSE 44 and a satellite channel is set up at 50'. Once a data mode has been set up on the satellite channel, a ringing signal 110 is sent from the MES ACSE 30 to the MES MIU 4, which sends a ringing indication 56' to the mobile DTE, and a ringing signal 112 is sent from the LES ACSE  
20 44 to the LES MIU 12, which sends a ringing tone 114 to the modem 16, causing the modem 16 to send a ringing indication 116 to the fixed DTE 18.

In response to the ringing indication 56', the mobile DTE 2 sends an ATA signal 66' to the MES MIU 4, which sends an  
25 off-hook indication 118 to the MES ACSE 30. A connect signal 120 is sent from the MES ACSE 30 to the LES ACSE 44, which sends a connect signal 122 to the LES MIU 12.

#### Training

After sending the off-hook indication 118, the MES MIU  
30 4 sends an Establish LCM 64 to the LES MIU 12, which signal is similar to the Establish LCM 64 in the example shown in Figure 4.

In response to receipt of the Establish LCM 64, the LES MIU 12 trains the modem 16 at 76, as in the example of Figure  
35 4.

When training is complete, the modem 16 sends a connect indication 78 to the fixed DTE 18 and the LES MIU 12 sends a



connected indication 70 to the LES ACSE 44, followed by the Connect LCM 80 to the MES MIU 4, to indicate the rate at which training was successful. In response to receipt of the Connect LCM 80, the MES MIU 4 sends a connect indication 82  
5 to the mobile DTE 2. To complete the training sequence, the LES MIU 12 sends the HDLC SABME signal 84 to the MES MIU 4, which responds with the HDLC UA 86, as in the Figure 4 example.

#### Data Transfer

10 Data transfer 90 may now take place over the satellite link. Data transfer 88, 92 and 94 may already have begun, in which case the data will be buffered at the local MIU.

#### Call Clearing

When data transfer is complete, the fixed DTE 18 sends  
15 an ATH signal 96' to the modem 16 and call clearing proceeds in the reverse direction to that shown in Figure 4, except that the MES MIU 4 signals the end of the call by indicating "NO CARRIER" 124 to the mobile DTE 2.

#### Signal Formats

20 The format of signals exchanged between the MES MIU 4 and the LES MIU 12 will now be explained with reference to Figure 6. Signals are transmitted on an RF channel with a single channel per carrier (SCPC). The signal commences with a header portion P, followed by a variable number of fixed-  
25 length SCPC frames  $SM_1, SM_2 \dots SM_n$ . The end of the signal is indicated by an end portion E.

Each SCPC frame SM is subdivided into four sections, each containing a header  $H_1, H_2, H_3, H_4$ , a data field  $D_1, D_2, D_3, D_4$ , and dummy bits (shaded). The data fields  $D_1$  and  $D_2$  together  
30 form one or more HDLC frame, which is repeated in the data fields  $D_3$  and  $D_4$ , to increase the energy per bit. The contents of each HDLC frame depend on whether data or control information is being sent.

If data is being sent, the HDLC frame has an information  
35 (I) format shown in Figure 7, formed from the concatenated data fields  $D_1$  and  $D_2$ . The data is headed by a packet length byte L, which indicates the length of valid data in the HDLC

frame.

There then follows an address byte A, two control bytes C and data I to the length indicated by the packet length byte L. The HDLC frame ends with a cyclic redundancy check CRC.

- 5 Any unused bytes following the CRC are filled with random data. The data I is only accepted by the receiving MIU if the CRC is valid. In ARQ mode, the receiving MIU requests re-sending of invalid HDLC frames, while in non-ARQ modes the invalid HDLC frames are discarded.

- 10 The control bytes C include acknowledgement and frame number information indicating the sequence number of the transmitted frame and the sequence number of the last frame received correctly.

- Line control messages are sent as unnumbered information (UI) HDLC frames, of a format shown in Figure 8. Each unnumbered information (UI) frame consists of a packet length byte L, an address byte A, a control byte C, an optional information field I and a two-byte CRC. Further HDLC frames may follow, with the last HDLC frame being terminated by hex  
20 FF and the remaining available bytes being filled with random bits. The line control parameters are encoded in the control byte C and optional information field.

- A supervisory (S) HDLC frame format is also used for flow control messages, but this format is not relevant as  
25 background to the present invention.

However, the above data communications system has not been implemented and the inventors have identified the following problems in the implementation of data communications systems of the type exemplified above.

30 Delay

- As can be seen from Figure 4 and 5, a delay occurs between the receipt of the connect indication 82 and the receipt of data at 88, by the MES DTE 2. The expected data may already have been sent by the fixed DTE 18, but would be  
35 buffered at the LES MIU 12. Likewise, there may be a considerable delay between receipt of the connect indication 78 by the fixed DTE 18 and the receipt of data at 94 by the

fixed DTE. The expected data may already have been sent by the mobile DTE 2, but will be buffered at the MES MIU 4 until the HDLC UA 86 has been sent.

In many protocols operated in DTEs, a timer is set upon receipt of a connect indication and, if there is a long delay before data is received, the timer may time out and terminate the call. One such protocol is PPP, which is used for Internet dial-in services. These protocols cannot usually be modified by the user. Therefore, such protocols appear unsuitable for use with a communications link of the type described above.

In the protocol described above, it is assumed that the Connect LCM 80 is correctly received by the MES MIU 4. If it is not, the call will fail.

Considerable delays may occur in the link between the MES MIU 4 and the LES MIU 12. The data generated by a DTE must be formatted by the local MIU into the frame formats described above, which incurs a delay because the data for a whole frame must be received before the length and CRC information can be calculated and the frame transmitted. The delay is equal to one frame duration, which is 240ms in the above example. The receiving MIU cannot begin to pass the data on until a complete SCPC frame is received and the CRC and length information can be checked. This incurs a further delay of one frame duration. The formatting and unformatting therefore incur approximately  $\frac{1}{2}$  second delay in either direction. These delays are in addition to processing delays at the MIUs and propagation delays in the satellite link, and result in a significant reduction of data throughput under protocols typically used by DTEs, particularly non-windowing or stop and wait protocols, such as X-protocols.

#### Mobile User Acceptance

The mobile user hears a ringing tone from the MES MIU 4 when the channel is set up in the example shown in Figure 5, or the ringing LCM 60 is received. However, this ringing tone is generated locally by the MES MIU 4 and may not resemble the ringing tone which would be heard from the PSTN 14 if the

mobile DTE 2 were instead connected by a conventional modem over the PSTN to the modem 16 and fixed DTE 18.

User acceptance of new communications systems is hampered by perceived differences from the system with which a user is familiar, so that the mobile user may doubt whether a call has been set up if the ringing tone is locally generated and does not vary according to the location of the fixed DTE 18.

#### Interrupt Signals

An interrupt signal, such as "break" or "Ctrl-C" is often used during connection to an on-line database, for example to interrupt a long undesired listing from the database. However, no means are provided in the protocols implemented by the MES MIU 4 and the LES MIU 12 in the above example for identifying an interrupt request over the satellite link, or for controlling data flow in that situation.

#### Summary of the Invention

According to one aspect of the present invention, there is provided interface apparatus for connection between a data terminal and a communications link which sends data received from the data terminal to the communications link under an HDLC protocol when it has received or sent a connection signal which establishes the parameters of a call, without sending an HDLC SABME command or an HDLC UA response. In this way, the delay between connection to a remote data terminal and receipt of the data by the remote terminal is reduced.

According to another aspect of the present invention, there is provided interface apparatus for connection between a data terminal and a communications link, which interface is arranged to send a connect command which establishes the parameters of a call, and which requires a response, to the communications link, and to send data received from the data terminal to the communications link before a response to the connect command is received. In this way, data is available at a remote interface as soon as it connects to a remote data terminal in response to the connect command.

According to another aspect of the present invention,

there is provided interface apparatus for connection between a data terminal and a communications link, which is arranged to send data from the data terminal to the communications link in a format comprising a frame having a data field including  
5 a plurality of subframes each of which comprises only length information and data. In this way, the interface need only delay transmission by one subframe duration, in order to calculate the length information, instead of by a whole SCPC frame duration. In addition, the remote interface can start  
10 sending data to a remote data terminal as soon as it is received from the communications link.

According to another aspect of the present invention, there is provided interface apparatus for connection between a first and a second communications link, which is arranged  
15 to receive a ringing signal from the first communications link, to discriminate either the type or the frequency and modulation of the ringing signal, and to send to the second communications link a selected one of a predetermined set of codes in accordance with the discrimination. As a result the  
20 ringing tone may be reproduced or indicated at equipment connected to the second communications link.

According to another aspect of the present invention, there is provided an interface between a first communications link and a second communications link, which is arranged to  
25 encode an interrupt signal from the first communications link, to send the encoded interrupt signal over the second communications link and to clear data from a data buffer in response to receipt of the interrupt signal.

In this way, interrupt signals may be sent without delay  
30 between communications links.

#### Brief Description of the Drawings

Specific embodiments of the present invention will now be described with reference to the accompanying drawings in which:

35 Figure 1 shows a link between data terminals over a satellite link and a PSTN;

Figure 2 is a functional block diagram of a mobile earth station and its associated interface to a data terminal;

Figure 3 is a functional block diagram of a fixed earth station and its associated interface to a PSTN;

5        Figure 4 is a protocol diagram showing a data call originated from a mobile earth station;

Figure 5 is a protocol diagram showing a data call originated from a fixed earth station;

10       Figure 6 is a diagram of the format of an SCPC signal sent over the satellite link;

Figure 7 is a diagram of the format of an HDLC information frame;

Figure 8 is a diagram of the format of HDLC unnumbered frames;

15       Figure 9 is a protocol diagram showing a modification to the protocols shown in Figures 4 and 5 in a first embodiment of the present invention;

Figure 10 is a flowchart of the operation of the MES MIU 4 in Figure 9;

20       Figure 11 is a flowchart of the operation of the LES MIU 12 in Figure 9;

Figure 12 is a diagram of the format of mini-frames used in a non-ARQ mode in the first embodiment;

25       Figure 13 is a diagram of the format of the ringing LCM 60 in the first embodiment;

Figure 14 is a diagram of the format of an SCPC signal in a second embodiment of the present invention;

Figure 15 is a diagram of the format of the HDLC information frame used in ARQ mode in the second embodiment;

30       Figure 16 is a diagram of the format of HDLC unnumbered frames used in ARQ mode;

Figure 17 is a diagram of the format of mini-frames used in non-ARQ mode.

### Modes for Carrying Out the Invention

#### 35    First Embodiment

An embodiment of the present invention, which is a modification of the protocol shown in Figures 4 and 5, is shown in Figure 9. The diagram of Figure 9 replaces the protocol exchange, in the section from the Establish LCM 64 to the data transfer 88, 90, 92 and 94 in Figures 4 and 5. The operation of the MES MIU 4 is described with reference to Figure 10, and the LES MIU 12 with reference to Figure 11. As soon as the satellite channel has been set up at 50 or 50' (step 200) the MES MIU 4 begins to send the Establish LCM 64 (step 202).

If the MES DTE 2 originated the call (step 222), as in Figure 4, the LES MIU 12 responds to the channel being set up (step 220) by sending the ringing LCM 60 to the MES MIU 4 (step 224). The LES MIU 12 then awaits receipt of the Establish LCM 64 (step 226) before beginning to train the modem 16 (step 228). Once training 76 is successful, the LES MIU 12 begins to send the Connect LCM 80 (step 230). Meanwhile, the modem 16 sends the connect indication 78 to the fixed DTE 18, which begins to send data 94, 92 to the LES MIU 12. After the LES MIU 12 has sent the Connect LCM 80, the remainder of the SCPC frame SM is vacant. The LES MIU 12 detects whether data has been received over the PSTN 14 (step 210) and, if so, fills the remainder of the SCPC frame SM with the data 90. The MES MIU 4 receives the Connect LCM 80 (step 204) in response to the Establish LCM 64, echoes the Connect LCM' 80 to the LES MIU 12 (Step 206) and sends the connect indication 82 to the mobile DTE 2 (step 208). The MES MIU 4 then receives the data 90 (step 210) and sends it as data 88 to the mobile DTE 2 (step 212). The mobile DTE 2 responds to the connect indication 82, by sending data 88' to the MES MIU 4 (step 214), which is sent to the LES MIU 12 (step 216) immediately after the echo 80' to the Connect LCM 80.

The LES MIU 12 continues to repeat the connection LCM 80 (step 230) in every SCPC frame SM, including the data 90 (steps 232, 234), until the echo 80' is received (step 236). Subsequently, the data 90' is sent as data 92' to the modem 16 and as data 94' to the fixed DTE 18. No SABME 84 is sent

by the LES MIU 12 or awaited by the MES MIU 4 before data can be sent. The SABME 84 can be dispensed with because it was decided that the MES MIU 4 and LES MIU 12 would always operate in asynchronous balanced mode and therefore there is no longer  
5 a need to send the SABME/UA signal and response during call set up, which are required by the HDLC protocols. Data can be received by the DTEs as soon as they receive a connect indication, so that the risk of certain DTE protocols timing out is substantially reduced.

10 The SABME/UA exchange may, however, be used to reset the satellite data link.

#### Mini-frames

A frame format used in this embodiment will now be described with reference to Figures 12 to 14.

15 In a non-ARQ mode, no error recovery procedures are used on the satellite link and it is therefore possible to depart from the HDLC frame format in order to overcome the problems of throughput delay. The HDLC frame format used in non-ARQ mode is shown in Figure 12.

20 The data field  $D_1$  comprises six mini-frames  $m_1$  to  $m_6$  and the data field  $D_2$  comprises six further mini-frames  $m_7$  to  $m_{12}$ . The mini-frames are repeated in data fields  $D_3$  and  $D_4$ . Each mini-frame  $m$  comprises 6 bytes, consisting of a length byte  $L$  and five data bytes  $b_1$  to  $b_5$ . The contents of each mini-  
25 frame  $m$  are as shown in Table 1 below.



Table 1

Type	L	b1	b2	b3	b4	b5
I	FA					
	50	*				
	5F	*	*			
	93	*	*	*		
	A0	*	*	*	*	
	6C	*	*	*	*	*
UI	05	Address	Control	Info	CRC	CRC

5           An information (I) type mini-frame m may include from zero to five bytes of valid data, and the number of valid bytes is indicated by the relevant hex code for the length byte L shown in Table 1. No CRC, address or control bytes are included. The I type mini-frame is used to carry user data.

10           An unnumbered information (UI) type mini-frame m has the length byte L set at "05", and includes an address byte  $b_1$ , a control byte  $b_2$ , an information byte  $b_3$  and two CRC bytes  $b_4$  and  $b_5$ . The UI type mini-frame is used to send line control messages (LCMs), which are encoded in the information byte  $b_3$ ,  
 15 as shown in Table 2 below.

Table 2

Command/Response	Ack type	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
Connection at 1200 bps without ARQ (from LES)	2	1	1	1	0	0	0	0	0
5 Connection at 2400 bps without ARQ (from LES)	2	1	1	1	1	0	0	0	0
ringing (from LES)	3	0	0	0	0	0	0	1	1
Break (both)	3	0	0	0	0	0	1	0	0

The heading "Ack Type" in Table 2 above refers to the type of acknowledgement required for that LCM. A Type 2 LCM is repeated until an echo is received or until a timer times out; the Connect LCM 80 is an example of this. A Type 3 LCM is sent only once and is echoed by the remote MIU. A Type 1 LCM (not shown in Table 2) is repeated until it is acknowledged by a different LCM; the Establish LCM 64 is an example of this. The Establish LCM 64 is not encoded in a mini-frame, since it is sent before non-ARQ mode can be established.

When encoding data into mini-frames, an MIU need only assemble enough data for one mini-frame, in order to calculate the length code L, before sending that mini-frame, in contrast to the normal HDLC information frame for which 66 bytes must be assembled and the CRC calculated before the data can be sent. I and UI mini-frames can be accommodated within the same SCPC frame. In the protocol shown in Figure 9, this feature allows data 90 to be sent immediately after the Connect LCM 80.

If less than five bytes of data are available for

formatting at an MIU, the number of bytes available will be formatted in a mini-frame and the length byte L will be set accordingly. The remaining bytes are filled with random bits.

In normal operation, when connection is achieved at 2400 bit/s, the satellite link, the link between the MES DTE 2 and the MES MIU 4 and the link between the LES MIU 12 and the modem 16 operate at nominally the same rate. However, the links are in fact plesiochronous, since there is no means provided for synchronising them.

If the data input rate to an MIU from the local DTE exceeds the output rate of the MIU to the satellite link, the excess data will be buffered until the buffer 22 or 34 is full, whereupon flow control signals are sent back to the local DTE. If the data rate from the local DTE is less than the output rate to the satellite link, mini-frames will be sent with less than five bytes per mini-frame.

#### Call Progress Indication

The format of the ringing LCM 60 will now be described with reference to Figure 13. In this example, the LES MIU 12 has not yet received the Establish LCM 64 and ARQ or non-ARQ mode are not established so that standard HDLC frames or mini-frames are not used.

Figure 13 shows a sequence of SCPC frames sent by the LES MIU 12 from the point at which a data mode channel is set up. The SCPC frames are subdivided into UI ringing frames r which indicate whether a ringing tone is present on the PSTN 14, and are terminated by a hex FF byte. Ring on frames  $r_1$  indicate ringing, whilst ring off frames  $r_0$  indicate no ringing. Thus,

in frame  $SM_2$ , the frames begin as  $r_0$ , change to  $r_1$  at point  $R_1$  where ringing begins and revert to  $r_0$  at point  $R_0$  where ringing ends.

If the ringing tone from the PSTN 14 is repeated, the  
5 frames  $r_1$  are again transmitted by the LES MIU 12 while the tone is present. The LES MIU 12 continues to sending ring off frames  $r_0$  during receipt of the answer signal 68 and modem training 76, which is completed at point  $T_c$ . From the beginning of the next SCPC frame  $SM_{n+1}$ , at  $T_0$ , the LES MIU 12  
10 uses standard HDLC frames in ARQ mode or mini-frames in non-ARQ mode, depending on the error recovery mode established by the Establish LCM 64.

In ARQ mode, the frame  $SM_{n+1}$  comprises a standard HDLC unnumbered frame containing the Connect LCM 80 and optionally  
15 one or more I frames, while in non-ARQ mode the frame  $SM_{n+1}$  comprises mini-frames  $m_1$  to  $m_{12}$  including the Connect LCM 80 and optionally one or more I frames containing any available data.

The MES MIU 4 receives the ringing frames  $r$  and signals  
20 the ringing indication 62 to the mobile DTE 2 in response to onset of the ring on frames  $r_1$ . The MES MIU 4 includes an audible tone generator which is activated by the ring on frames  $r_1$  and therefore reproduces the cadence of the ringing signal from the PSTN 14. This reassures the user that the  
25 ringing tones actually represent ringing at the PSTN 14.

In one embodiment, the LES MIU 12 analyses the frequency and tone modulation of the ringing tone 58 and encodes these in the ring on frames  $r_1$ . The MES MIU 4 decodes the frequency

and modulation and activates the audible tone generator to reproduce the ringing tone 58 accurately.

In another embodiment, as well as encoding ringing signals, the LES MIU 12 also encodes "busy" and "unobtainable" signals received from the PSTN 14, so that the mobile user gains more complete information on call progress at the PSTN 14.

The LES MIU 12 compares the signals from the PSTN 14 with known "ringing", "busy" and "unobtainable" signals and selects a corresponding code for sending the MES MIU 4. The code is sent in a UI frame, in the same way as the ring on frames  $r_1$ .

Alternatively, if the PSTN 14 is of the type which generates sub-band call progress signals instead of call progress tones, the LES MIU 12 may generate a corresponding code directly in response to the sub-band call progress signals without detecting their duration or frequency.

An additional advantage of encoding the type of the call progress signals is that the MES DTE 2 may display the call progress status, so that the user does not have to recognise what status is meant by the reproduced tones.

#### Interrupt Signals

A DTE user wishing to interrupt the progress of a data call may enter a "break" command at the DTE. It is important that the "break" command should reach the remote DTE as soon as possible, since it usually indicates that unwanted data is being received or the user wishes to terminate the call abruptly. Therefore, when the LES MIU 12 receives a "break" command from the fixed DTE 18 over the PSTN 14, or the MES MIU

4 receives a "break" command from the mobile DTE 2, it discards any buffered data awaiting transmission over the satellite link and sends a break signal in the next frame as an LCM. The format of a mini-frame break LCM is shown in 5 Tables 1 and 2 above, for sending in non-ARQ mode.

In ARQ mode, the break signal is sent in an unnumbered HDLC frame. The receiving MIU receives the break signal over the satellite link and transmits a break command to the local DTE immediately, discarding any buffered data to be sent to 10 the local DTE. In this way, break commands can be sent rapidly to the remote DTE. As well as "break" commands, other interrupt commands such as "Ctrl-C" may be encoded and the buffers cleared in the same way.

The above embodiments have been described with reference 15 to the Inmarsat-M (TM) asynchronous data service. However, the embodiments may be applied to the Inmarsat-B (TM) asynchronous data service, with certain modifications described below. The Inmarsat-B (TM) system is capable of data rates of up to 9600 bit/s and therefore different signal 20 formats, frame lengths and parameter codes are needed.

#### Second Embodiment

Figure 14 shows the format of an Inmarsat-B (TM) signal on a single RF channel. The signal begins with a header portion P, followed by SCPC frames SB<sub>1</sub> to SB<sub>n</sub> and terminated 25 by an end signal E.

Each SCPC frame contains 1872 bits and has a duration of 80ms; it is subdivided into four data fields D<sub>1</sub> to D<sub>4</sub> each preceded by a sub-band signalling field S<sub>1</sub> to S<sub>4</sub>. Data fields

$D_3$  and  $D_4$  do not repeat data fields  $D_1$  and  $D_2$ , but contain additional data.

Figure 15 shows the contents of the data fields  $D_1$  to  $D_4$  concatenated to form an HDLC information (I) frame, comprising  
5 a length byte L, address byte A, control byte C, variable length data I up to a maximum of 98 bytes, and a two-byte CRC. The length byte L indicates the position of the CRC and any remaining bytes after the CRC are filled with random bits.

In the format shown in Figure 16, the contents of the  
10 data fields  $D_1$  to  $D_4$  are concatenated at the receiving MIU to form one or more unnumbered information (UI) HDLC frames  $U_1$  to  $U_n$ . Each UI frame comprises a length byte L, an address byte A, a control byte C, an optional information field I and two CRC bytes. After the last frame  $U_n$ , a byte is set to hex FF  
15 and the remaining available bytes are filled with random bits. Each UI frame may carry an LCM.

Figure 17 shows the format of mini-frames m used for Inmarsat-B (TM). Each data field D contains two mini-frames of 13 bytes each, with the last two bits of the data field D  
20 being unused. The format of each mini-frame m depends on the type of the mini-frame, as shown in Table 3 below.

Table 3

Type	I.	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	b <sub>5</sub>	b <sub>6</sub>	b <sub>7</sub>	b <sub>8</sub>	b <sub>9</sub>	b <sub>10</sub>	b <sub>11</sub>	b <sub>12</sub>
I	AF												
I	3A	*											
I	CA	*	*										
I	F6	*	*	*									
I	F9	*	*	*	*								
I	C6	*	*	*	*	*							
I	F5	*	*	*	*	*	*						
I	OA	*	*	*	*	*	*	*					
I	39	*	*	*	*	*	*	*	*				
I	9A	*	*	*	*	*	*	*	*	*			
I	F2	*	*	*	*	*	*	*	*	*	*		
I	FC	*	*	*	*	*	*	*	*	*	*	*	
I	7B	*	*	*	*	*	*	*	*	*	*	*	*
UI	05	A	C	I	CRC	CRC	IF	random	random	random	random	random	random



An information (I) type mini-frame has one length byte L and twelve data bytes  $b_1$  to  $b_{12}$ . The length byte L indicates the number of valid data bytes  $b$ , as in the first embodiment, with any unused bytes containing random bits. An unnumbered  
 5 information (UI) type mini-frame uses only bytes  $b_1$  to  $b_5$ . Byte  $b_5$  contains hex FF, while bytes  $b_7$  to  $b_{12}$  contain random bits. The information I carried in byte  $b_3$  is shown in Table 4 below.

Table 4

10	<b>Command/Response</b>	<b>Ack type</b>	<b>bit 7</b>	<b>bit 6</b>	<b>bit 5</b>	<b>bit 4</b>	<b>bit 3</b>	<b>bit 2</b>	<b>bit 1</b>	<b>bit 0</b>
	Connection at 1200 bps without ARQ (from the CES)	2	1	1	1	0	0	0	0	0
15	Connection at 2400 bps without ARQ (from the CES)	2	1	1	1	1	0	0	0	0
	Connection at 4800 bps without ARQ (from the CES)	2	1	1	1	1	1	0	0	0
20	Connection at 9600 bps (or greater) without ARQ (from CES)	2	1	1	1	1	1	1	0	0
	Break (both)	3	0	0	0	0	0	1	0	0

In the Connect LCM 80, data rates of 1200, 2400, 4800 or  
 25 9600 bit/s may be indicated, which are the data rates supported by Inmarsat-B (TM). The acknowledge type corresponds to the type described above with reference to

Table 2.

In the above description, the modem interface units may either be separate units from the DTEs and earth stations or may be integrated with their respective earth stations. Furthermore, the mobile DTE 2, the MES MIU 4 and the MES 6 may all be incorporated in a single mobile unit.

The MES MIU 4 and the MES 6 may be a fixed installation and may serve a local network which connects many DTEs to the MES MIU 4. The PSTN 14 may be replaced by a local network. These and other variants are well-known to the skilled person.

The present invention is not limited to data service systems of the Inmarsat-M (TM), Inmarsat mini-M (TM) or Inmarsat-B (TM) type. Instead, the skilled person will recognise that the protocols and formats described may be applied to other communications systems having interfaces between communications links conforming to different standards, and in particular systems in which delay may be incurred by the protocols or formats implemented by such interfaces or in which it is desirable to emulate call progress tones from conventional single links in such systems or in which break signals must be handled without delay.

The present invention may advantageously be applied to a communications system including a satellite link, but is also applicable to terrestrial cellular communications systems, and other systems including a terrestrial radio frequency link or other types of link.

**CLAIMS**

1. A method of operating a data communications interface connected between a first data terminal and a digital radio frequency communications link connectable to a  
5 second data terminal; comprising:

receiving from the digital communications link a connection control signal which sets the parameters to be used for data communication between the first and second terminals;  
and

10 sending data received from the first data terminal to the digital communications link in response to receipt of said connection control signal.

2. A method of operating a data communications interface connected between a second data terminal and a  
15 digital radio frequency communications link connectable to a first data terminal; comprising:

(a) sending to the digital communications link a connection control signal which sets the parameters to be used for data communications between the first and second data terminals;

20 and

(b) sending data received from the second data terminal to the digital communications link in response to the completion of step (a).

3. A method as claimed in claim 2, comprising  
repeating steps (a) and (b) until a confirmation signal,  
which indicates receipt of the connection control signal by  
remote equipment, is received from the digital communications  
5 link.

4. A method as claimed in any preceding claim, wherein  
the data communications interface is operable in HDLC  
asynchronous balanced mode for communication over the digital  
communications link.

10 5. A method of operating a data communications  
interface between a data terminal and a digital radio  
frequency communications link, comprising:

transmitting a signal to the digital communications link  
in a format comprising one or more frames each of a constant  
15 frame length, each said frame including a plurality of  
subframes each of a constant subframe length and including  
variable length information indicative of the length of valid  
information in that subframe.

6. A method of operating a data communications  
20 interface between a first data terminal and a digital radio  
frequency communications link for connection to a second data  
terminal, comprising:

receiving a signal from the digital communications link in a format comprising one or more frames, each of a constant frame length, each said frame including a plurality of subframes each of a constant subframe length and including  
5 variable length information indicative of the length of valid information in that subframe, wherein one of said subframes includes a plurality of data sent by said second data terminal, and

sending the first of said data received to the first data  
10 terminal before the last of said data is received from the digital communications link.

7. A method of operating a communications interface connected between a telephone network and a digital communications link, comprising:

15 receiving a call progress signal from the telephone network and sending call progress information over the digital communications link in response thereto, wherein said call progress information includes information relating to the frequency of said call progress signal.

20 8. A method as claimed in claim 7, wherein the call progress information includes information relating to the modulation of said call progress signal.

9. A method of operating a communications interface between a telephone network and a digital communications link, comprising:

receiving a call progress signal from the telephone  
5 network, selecting one of a predetermined set of call progress codes according to the type of the call progress signal and sending the selected call progress code over the digital communications link.

10. A method as claimed in claim 9, wherein said set of  
10 codes correspond to a ringing, busy and an unobtainable type of call progress signal respectively.

11. A method of operating a data communications interface between a data terminal and a digital radio frequency communications link, said interface having a buffer  
15 for storing data for transmission from the data terminal to the digital communications link, comprising:

receiving an interrupt indication from the data terminal;  
and

clearing said buffer and sending an interrupt signal to  
20 the digital communications link in response to the receipt of the interrupt indication.

12. A method of operating a data communications

interface between a data terminal and a digital radio frequency communications link, said interface having a buffer for storing data received from the digital communications link for sending to the data terminal, comprising

5       receiving an interrupt signal from the digital communications link; and

clearing said buffer and sending an interrupt indication to the data terminal in response to receipt of the interrupt signal.

10       13. A method as claimed in any preceding claim, wherein said digital communications link comprises a satellite link.

14. Data communications interface apparatus for connection between a first data terminal and a digital radio frequency communications link connectable to a second data  
15 terminal, comprising:

means for receiving data from the first data terminal;

means for detecting receipt from the digital communications link of a connection control signal for setting the parameters to be used for data communication between the  
20 first and second data terminals; and

means for sending said received data to the digital communications link in response to the detection of said connection control signal.

15. Data communications interface apparatus for connection between a second data terminal and a digital radio frequency communications link for communication with a first data terminal, comprising:

5        means for sending to the digital communications link a connection control signal for setting the parameters to be used for data communications between the first and second data terminals;

         means for receiving data from the second data terminal;

10    and

         means arranged to send said received data to the digital communications link in response to the sending of the connection control signal.

16. Apparatus as claimed in claim 14 or 15, further  
15    comprising means for detecting receipt of a confirmation signal from the digital communications link, wherein said means for sending the connection control signal is arranged to repeat the sending of the connection control signal, and the means arranged to send the received data is arranged to  
20    repeat the sending of the received data, until receipt of said confirmation signal is detected, said confirmation signal being indicative of receipt of the connection control signal by remote apparatus connected to the digital communications link.



17. Apparatus as claimed in any one of claims 14 to 16, including an interface operable in HDLC asynchronous balanced mode for communication over the digital communications link.

18. Data communications interface apparatus for  
5 connection between a data terminal and a digital radio frequency communications link, comprising:

means arranged to send information to the digital communications link in a format comprising:

one or more frames each of a constant frame length, each  
10 said frame including a plurality of subframes each of a constant subframe length and including variable length information indicative of the length of valid information in that subframe.

19. Data communications interface apparatus for  
15 connection between a first data terminal and a digital radio frequency communications link connectable to a second data terminal, comprising:

means for receiving a signal from the digital communications link in a format comprising:

20 one or more frames, each of a constant frame length, each said frame including a plurality of subframes each of a constant subframe length and including variable length information indicative of the length of valid information in

that subframe, wherein one of said subframes includes a plurality of data sent by said second data terminal, and

means arranged to send the first of said data to the first data terminal before the last of said data is received  
5 from the digital communications link.

20. Communications interface apparatus for connection between a telephone network and a digital communications link, comprising:

means for receiving a call progress signal from the  
10 telephone network and means responsive to said receipt to send call progress information over the digital communications link, wherein said call progress information includes information relating to the frequency of said call progress signal.

15 21. Apparatus as claimed in claim 20, wherein the call progress information includes information relating to the modulation of said call progress signal.

22. Communications interface apparatus for connection between a telephone network and a digital communications link,  
20 comprising:

means for receiving a call progress signal from the telephone network and means responsive to said receipt to

select one of a predetermined set of codes according to the type of said call progress signal and to send said selected call progress code over the digital communications link.

23. Apparatus as claimed in claim 22, wherein said  
5 predetermined set of codes corresponds to ringing, busy and unobtainable call progress signals respectively.

24. Data communications interface apparatus for connection between a data terminal and a digital radio frequency communications link, comprising a buffer for storing  
10 data for transmission from the data terminal to the digital communications link,

means for detecting an interrupt indication from the data terminal;

means arranged to clear said buffer in response to said  
15 detection; and

means arranged to send an interrupt indication to the digital communications link in response to said detection.

25. Data communications interface apparatus for connection between a data terminal and a digital radio frequency communications link, comprising a buffer for storing  
20 data transmission from the digital communications link to the data terminal;

34

means for detecting an interrupt indication from the digital communications link;

means arranged to clear said buffer in response to said detection; and

5 means arranged to send an interrupt signal to the data terminal in response to said detection.

26. A satellite earth station including apparatus as claimed in any one of claims 14 to 25.

27. Data terminal equipment including apparatus as  
10 claimed in any one of claims 14 to 25.

28. A communication system including apparatus as claimed in any one of claims 14 to 25.

1/16

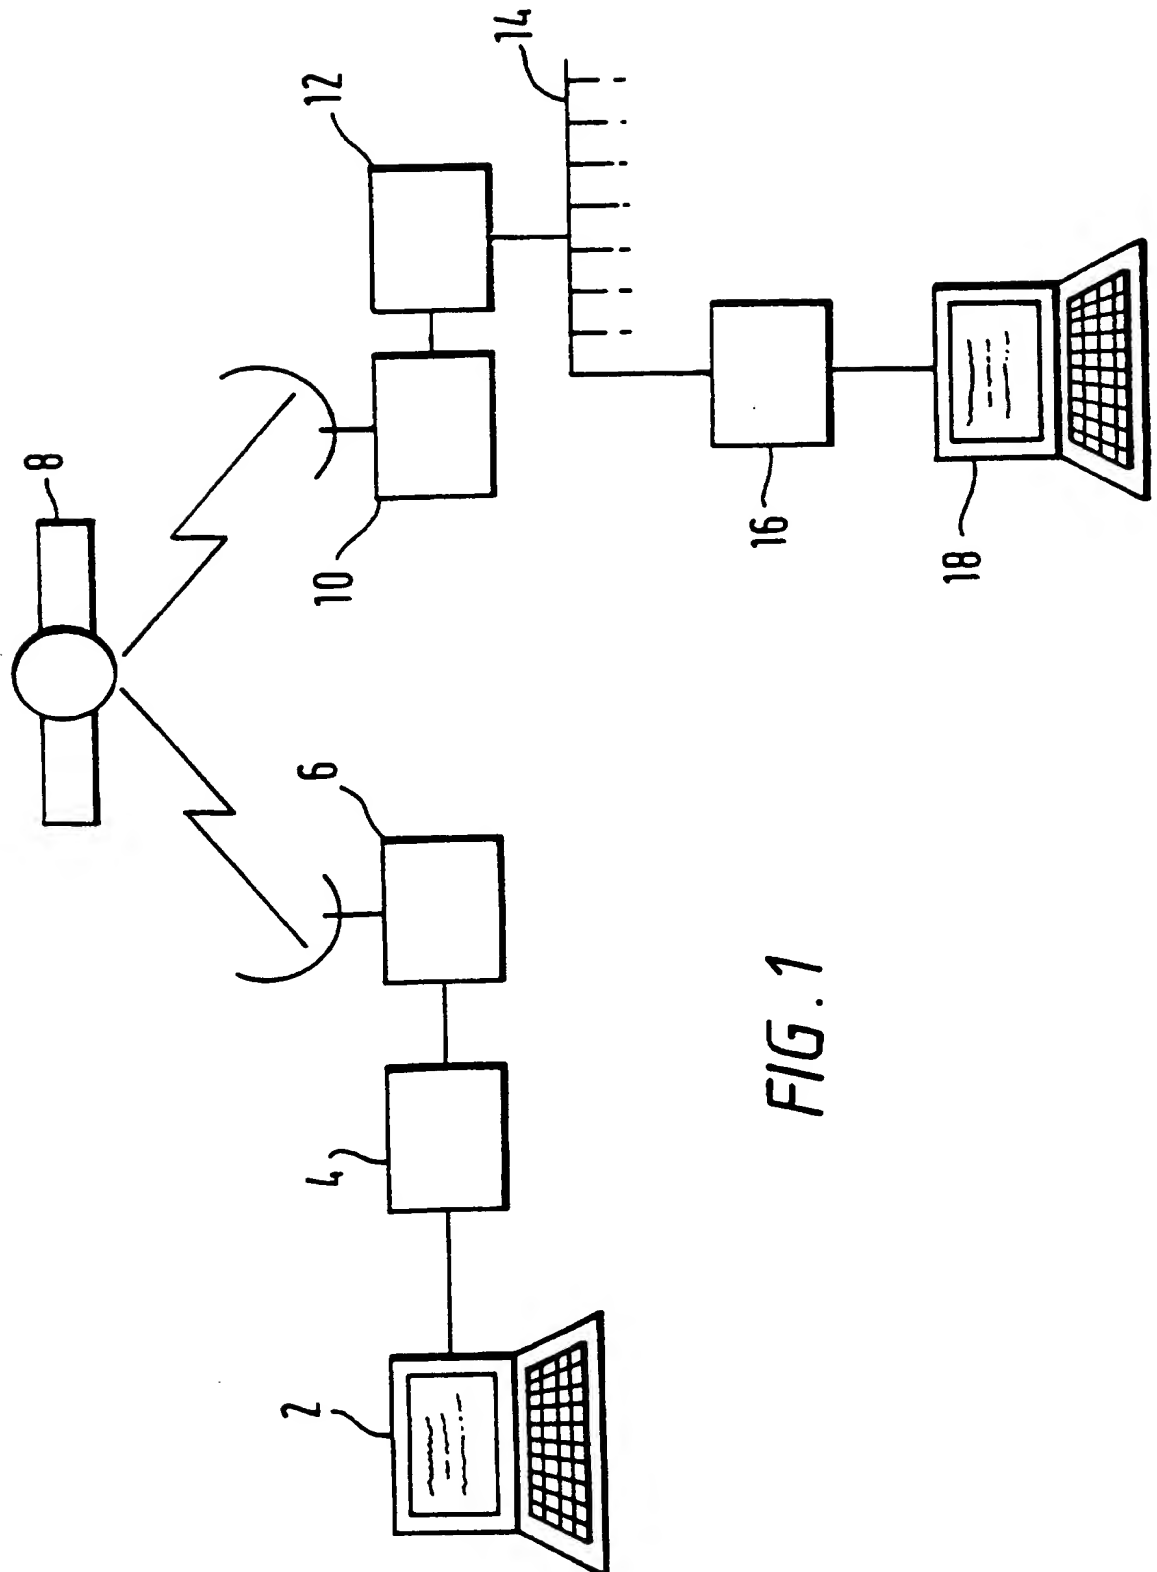


FIG. 1

2/16

FIG. 2


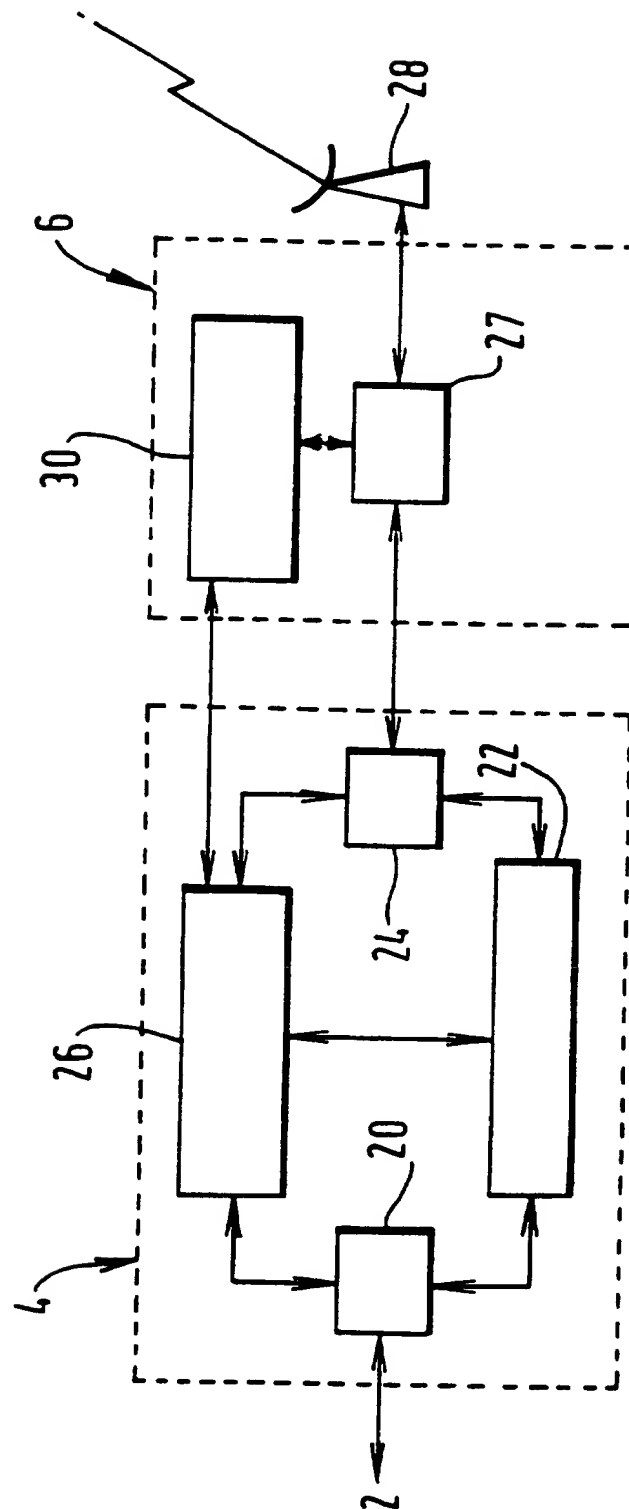


FIG. 3

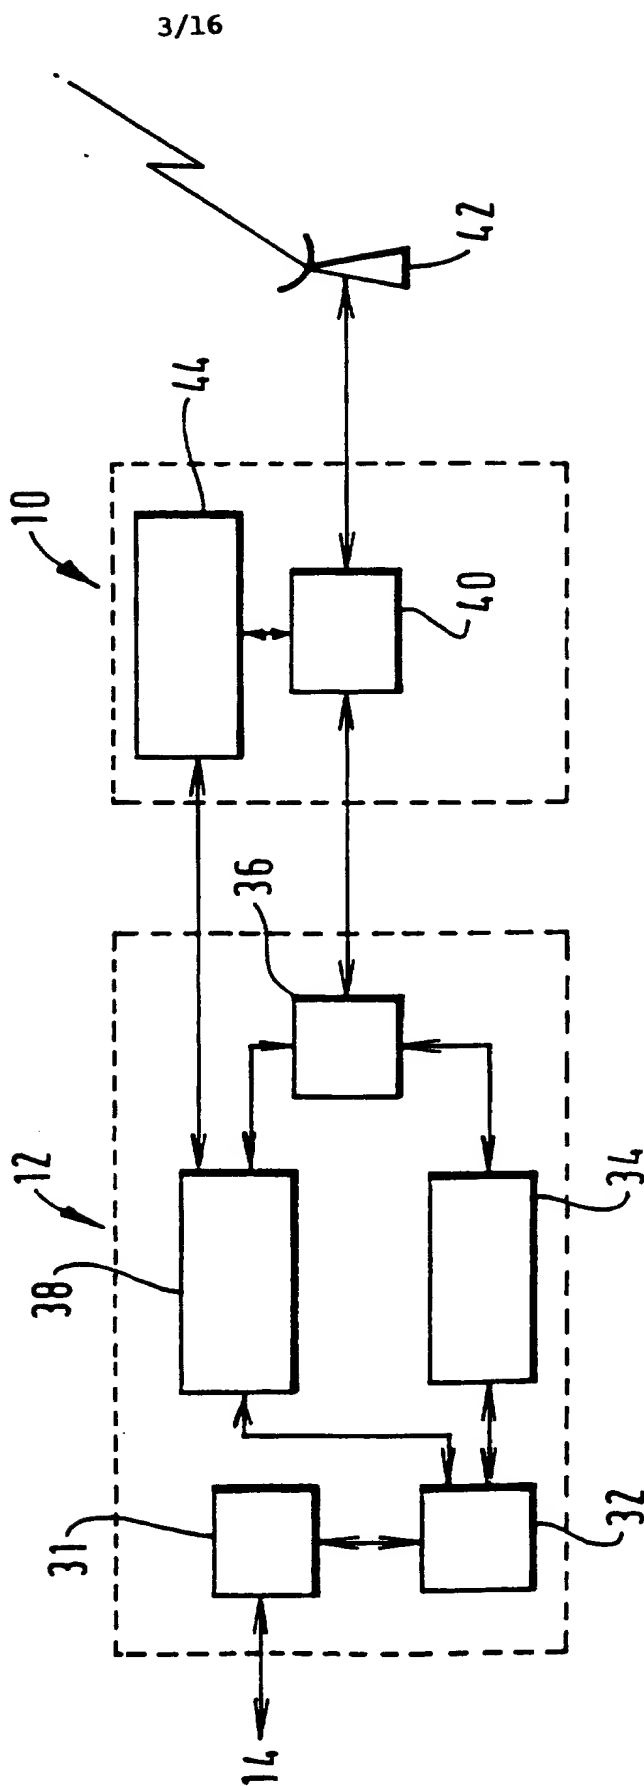

4/16

FIG. 4

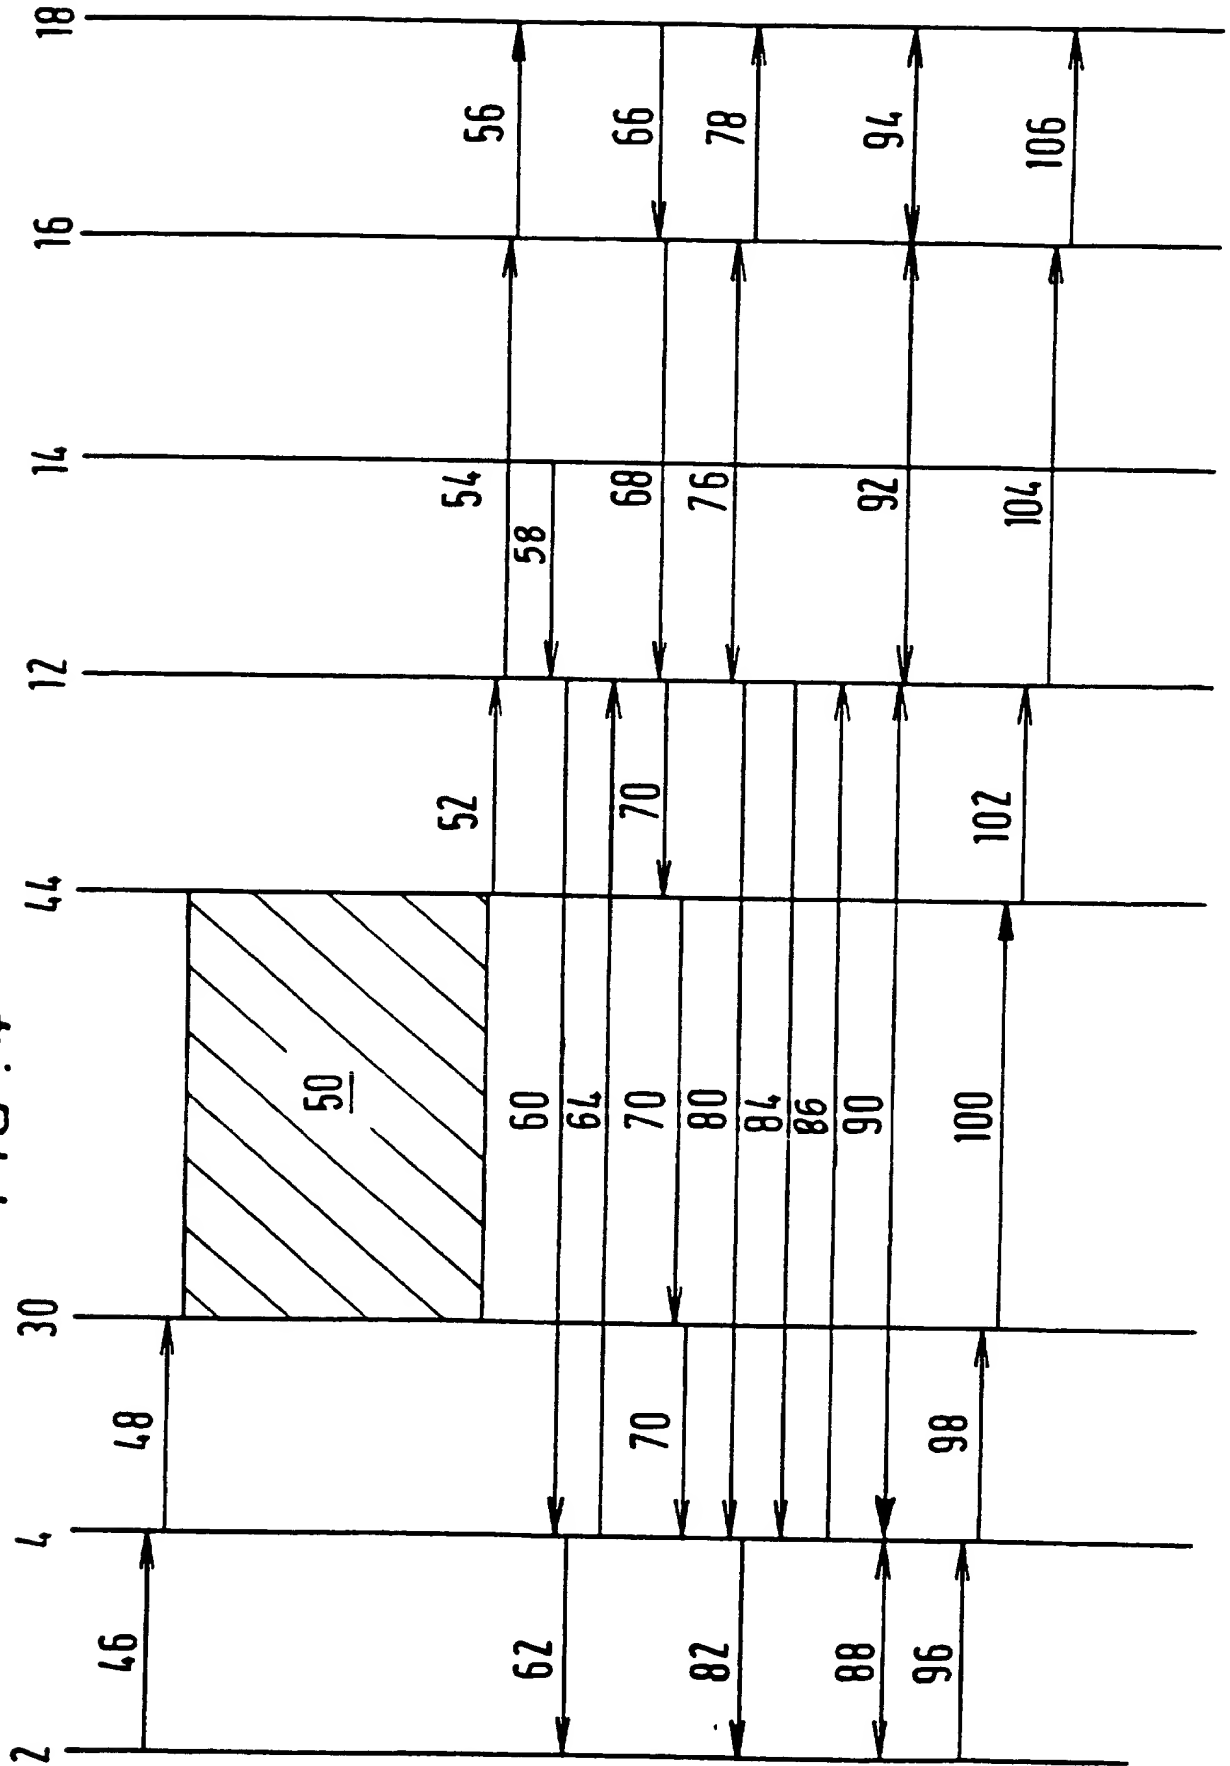




FIG. 5

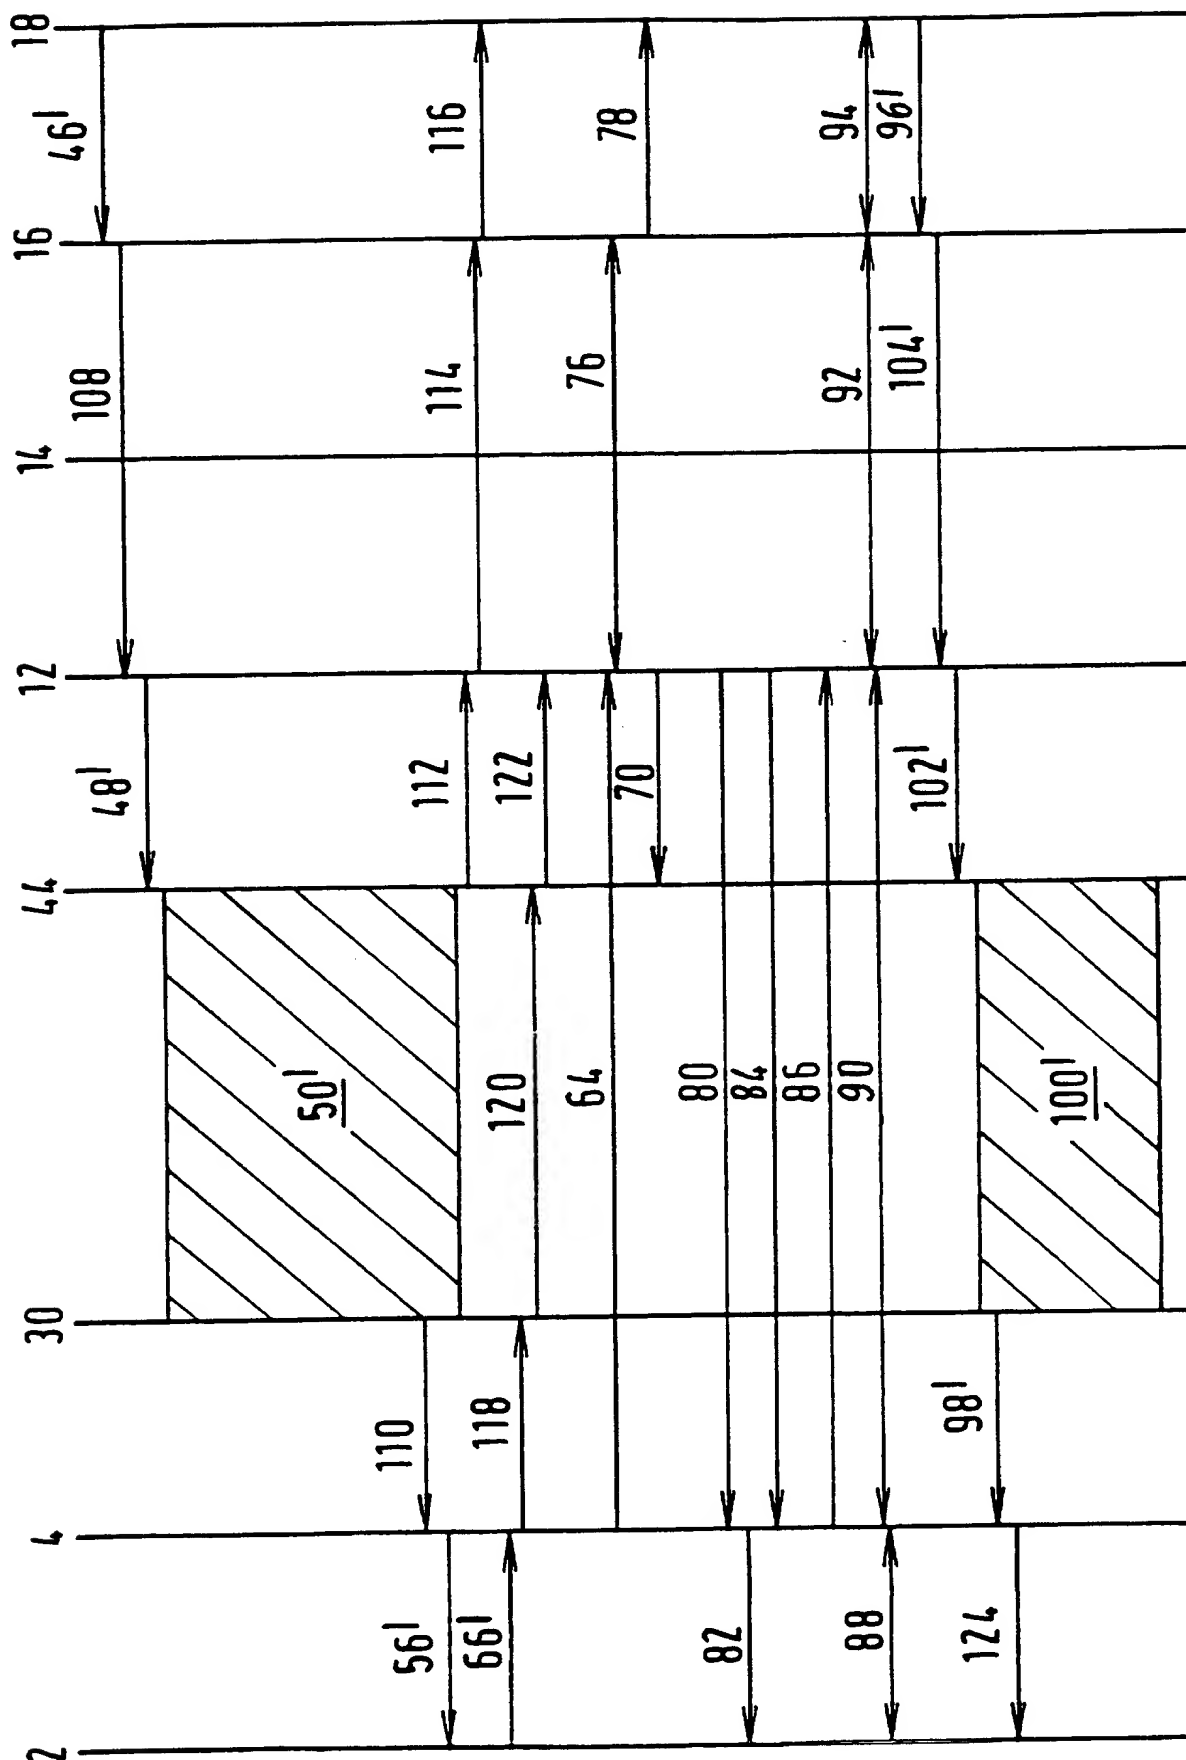


FIG. 6

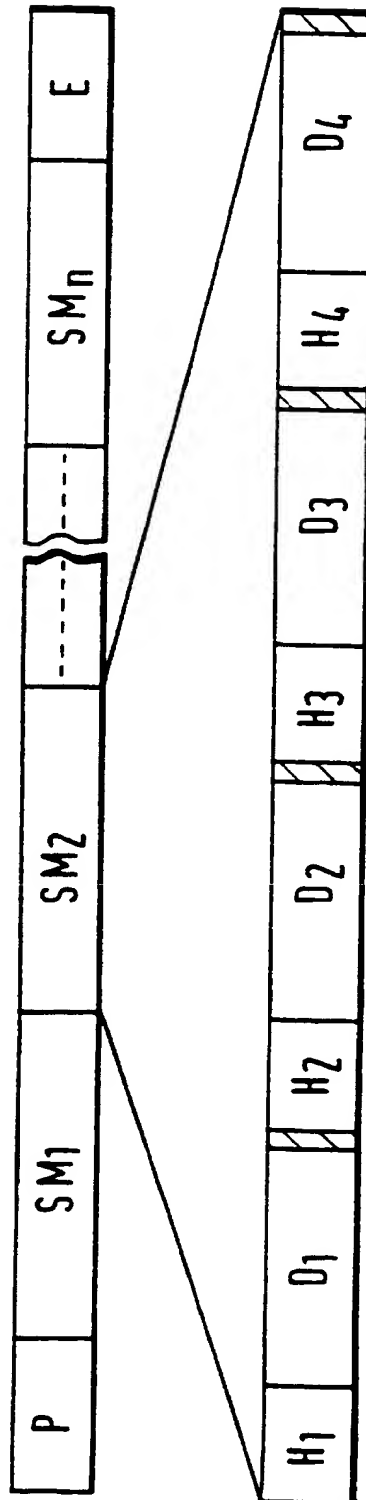


FIG. 7



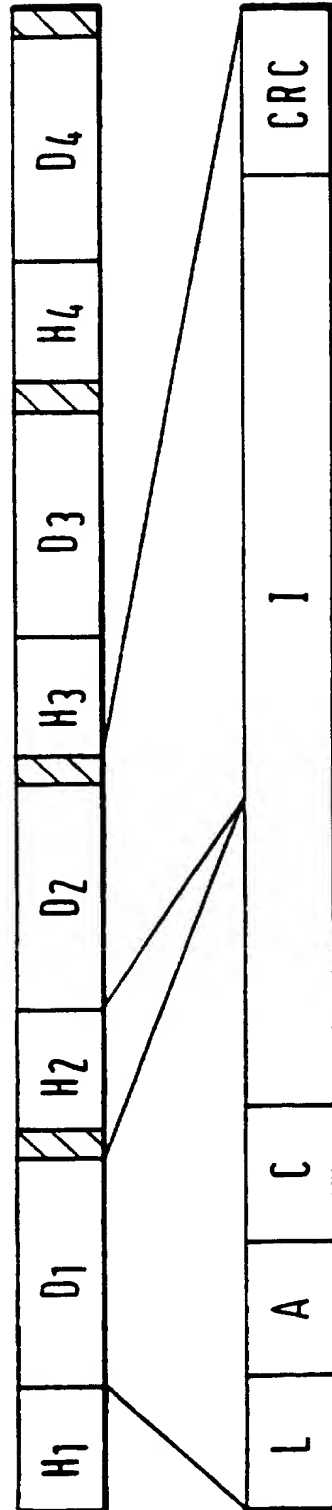


FIG. 8

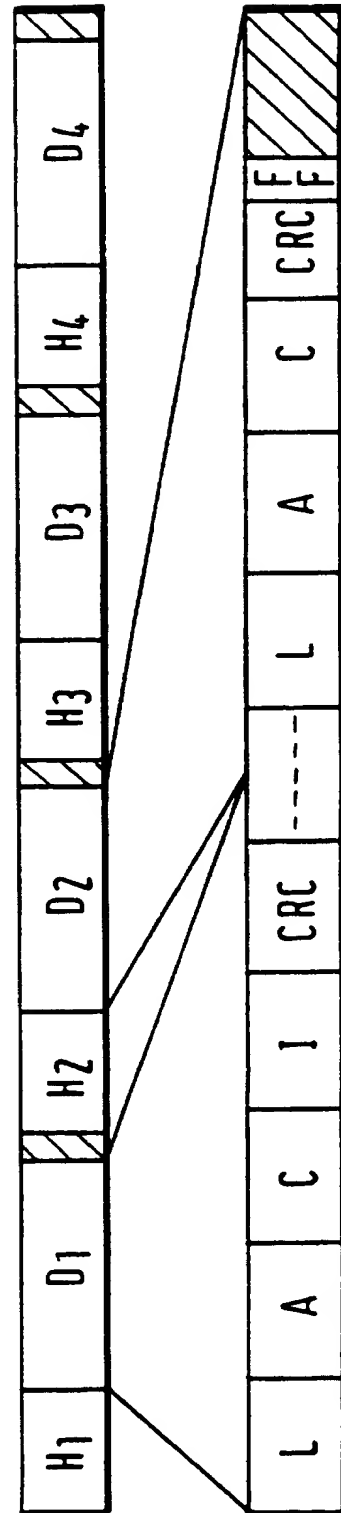


8/16

FIG. 9

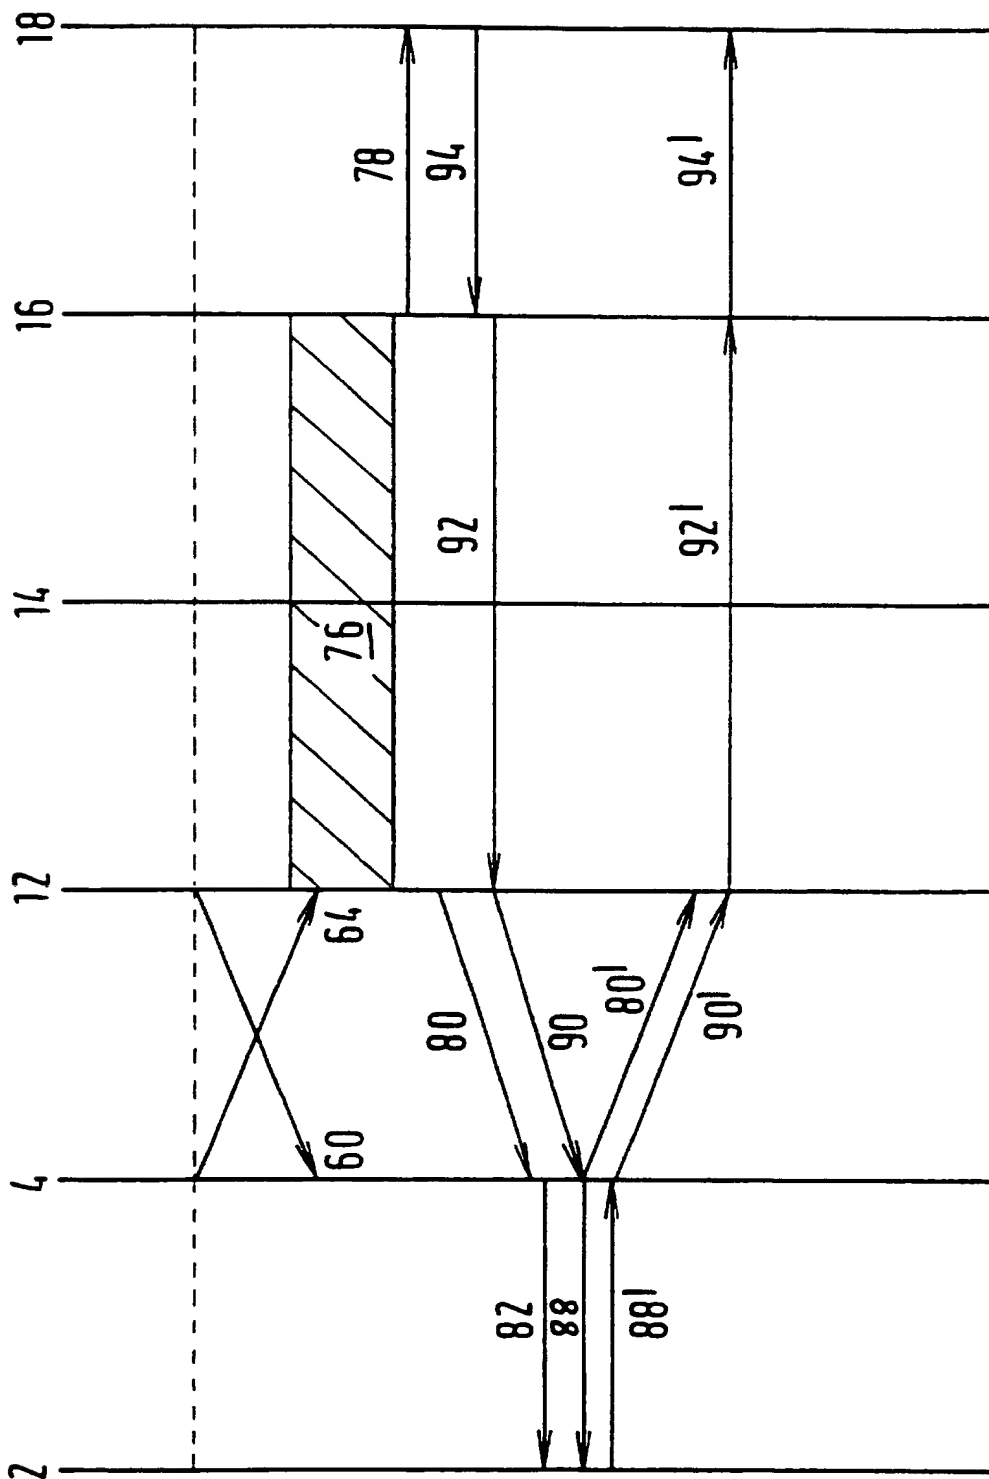

9/16

FIG. 10

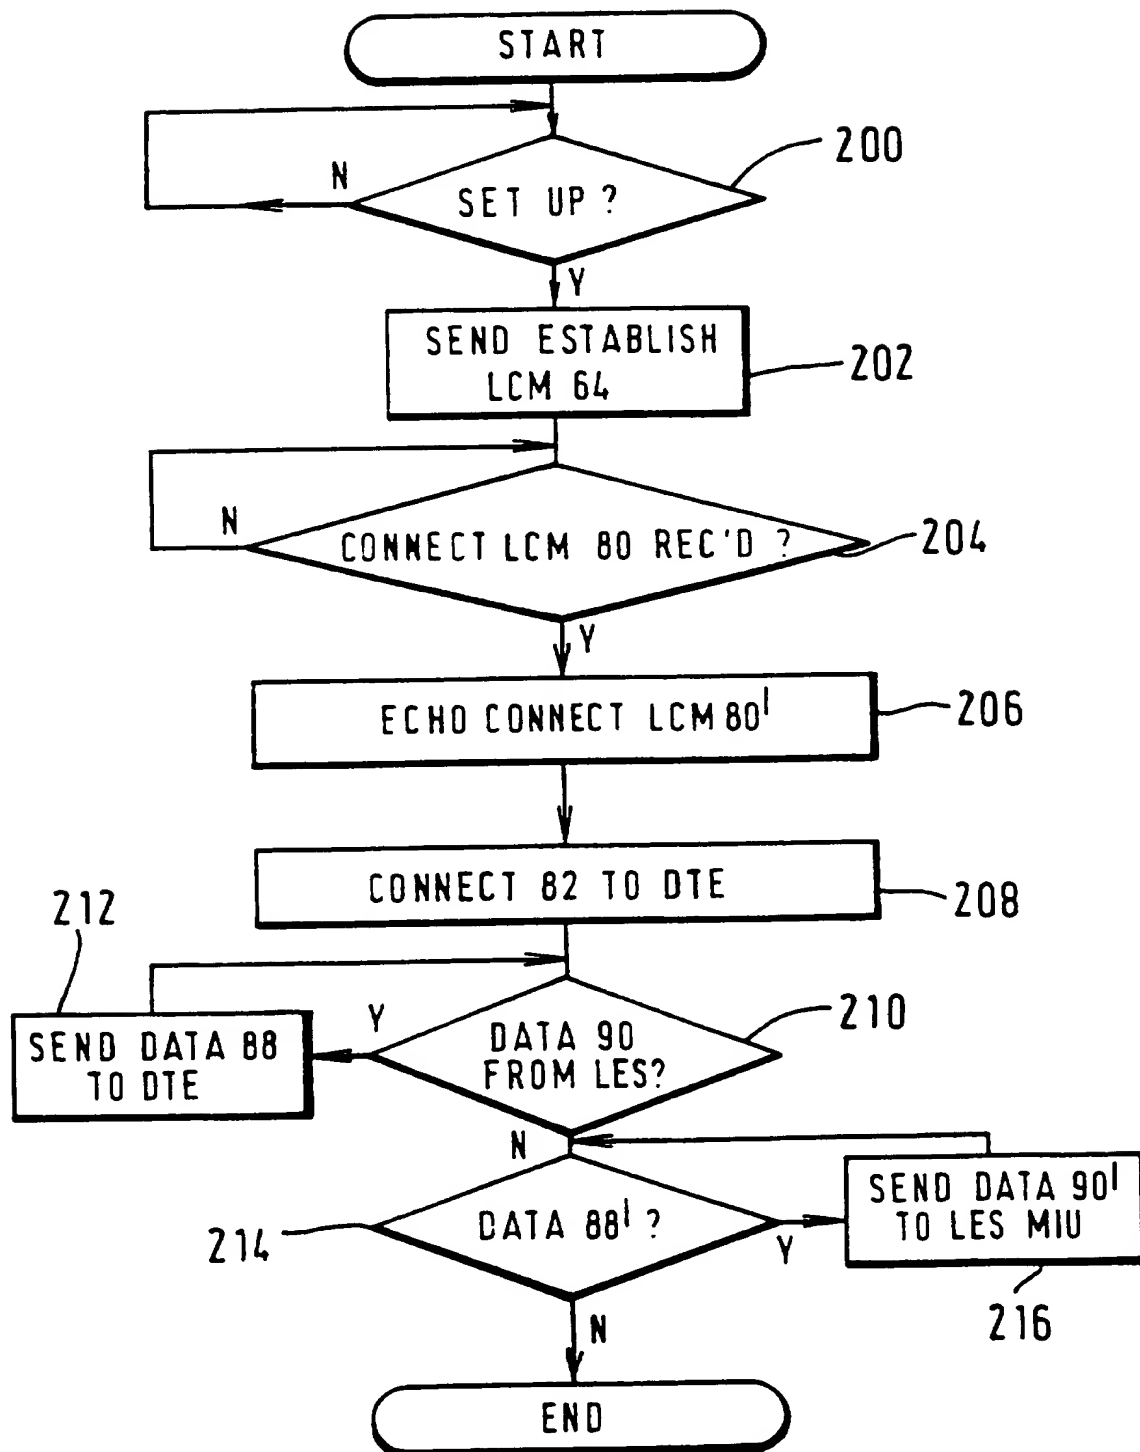

10/16

FIG. 11

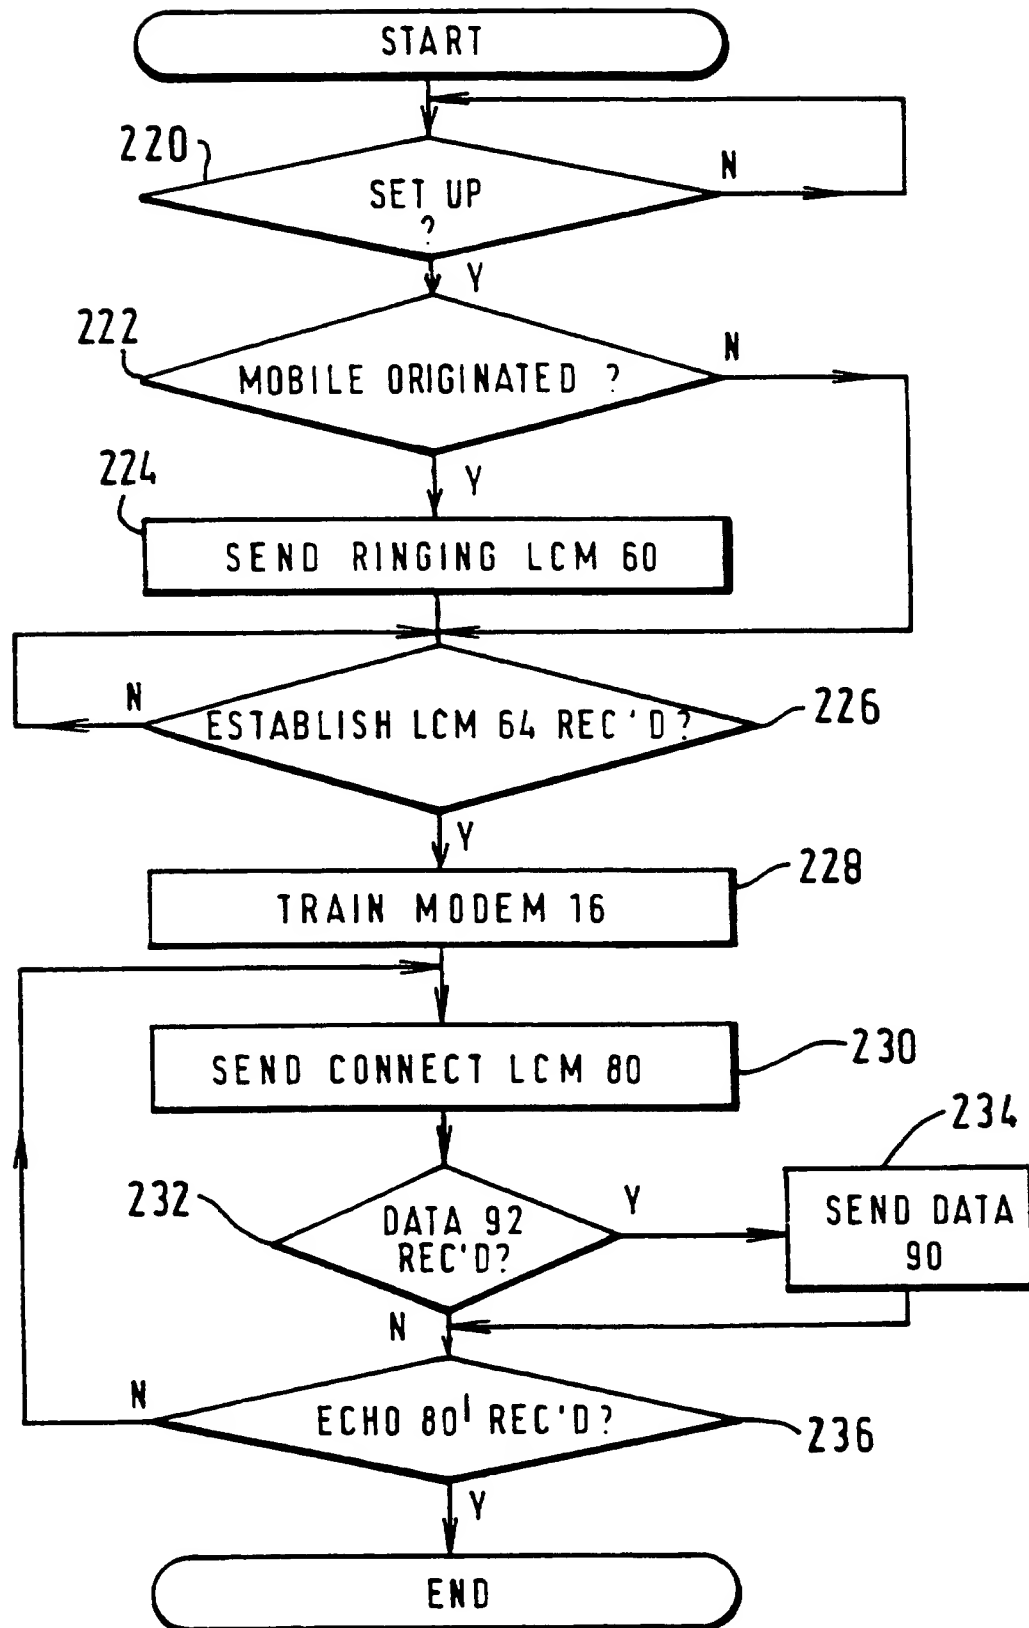


FIG. 12

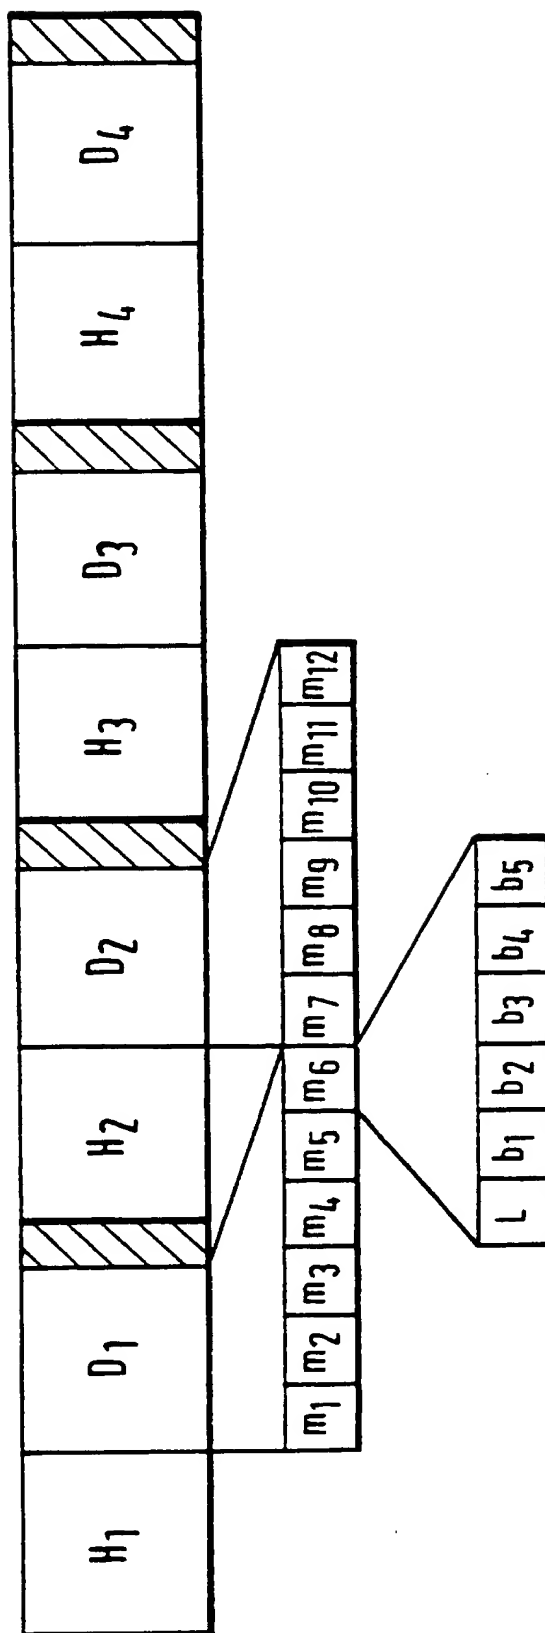


FIG. 13

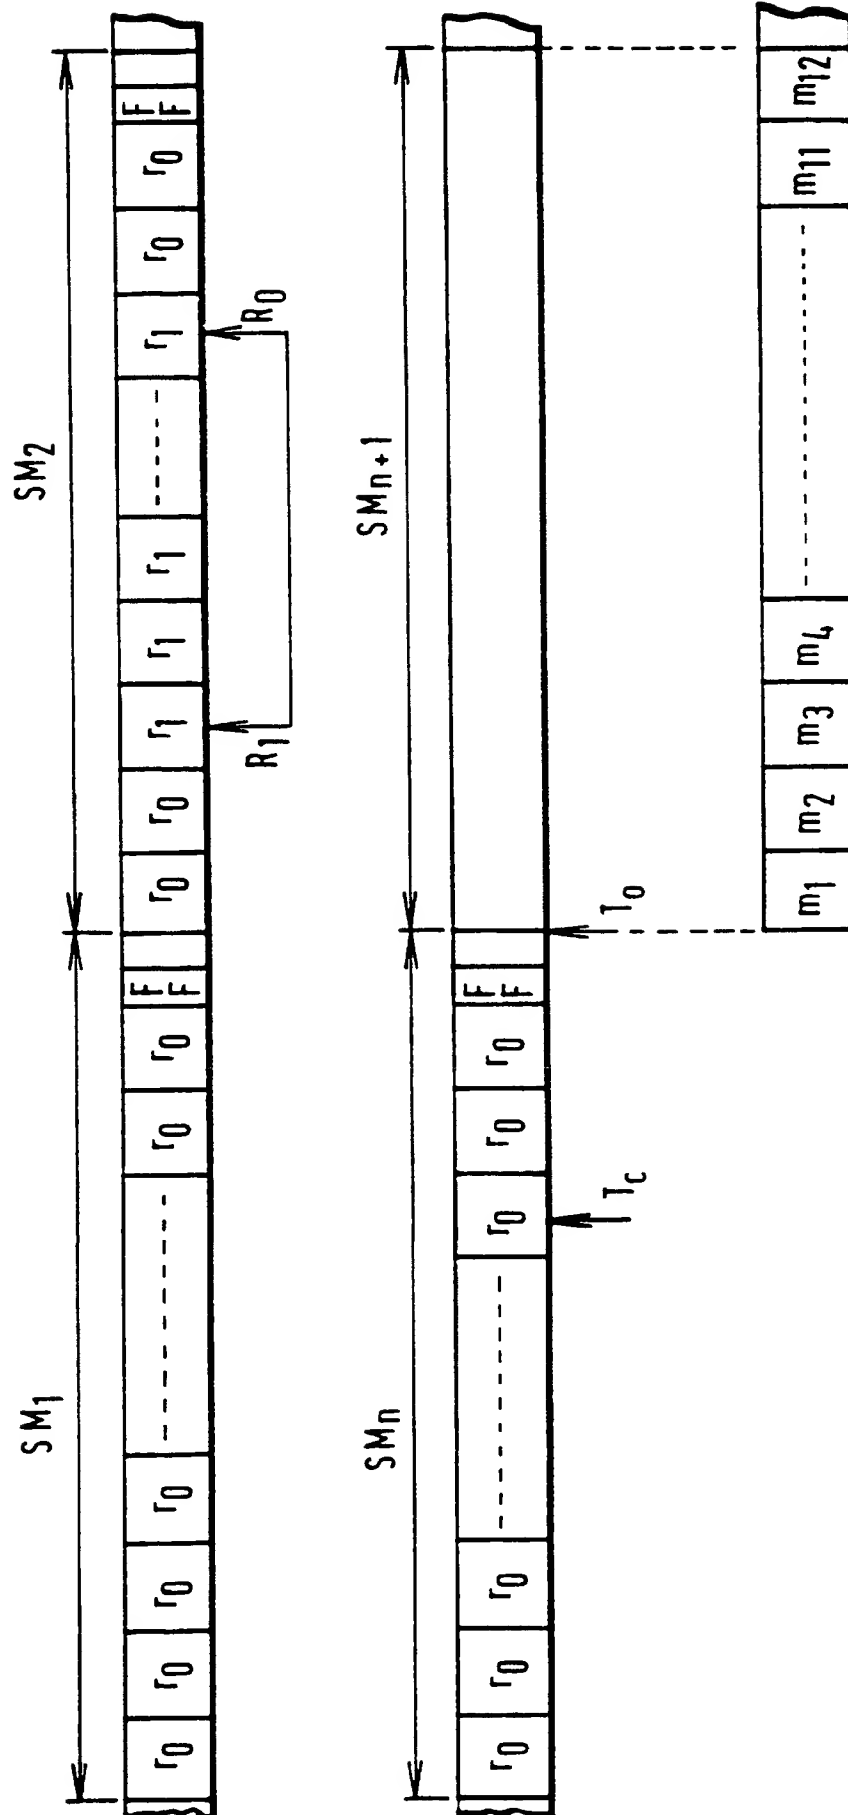




FIG. 14

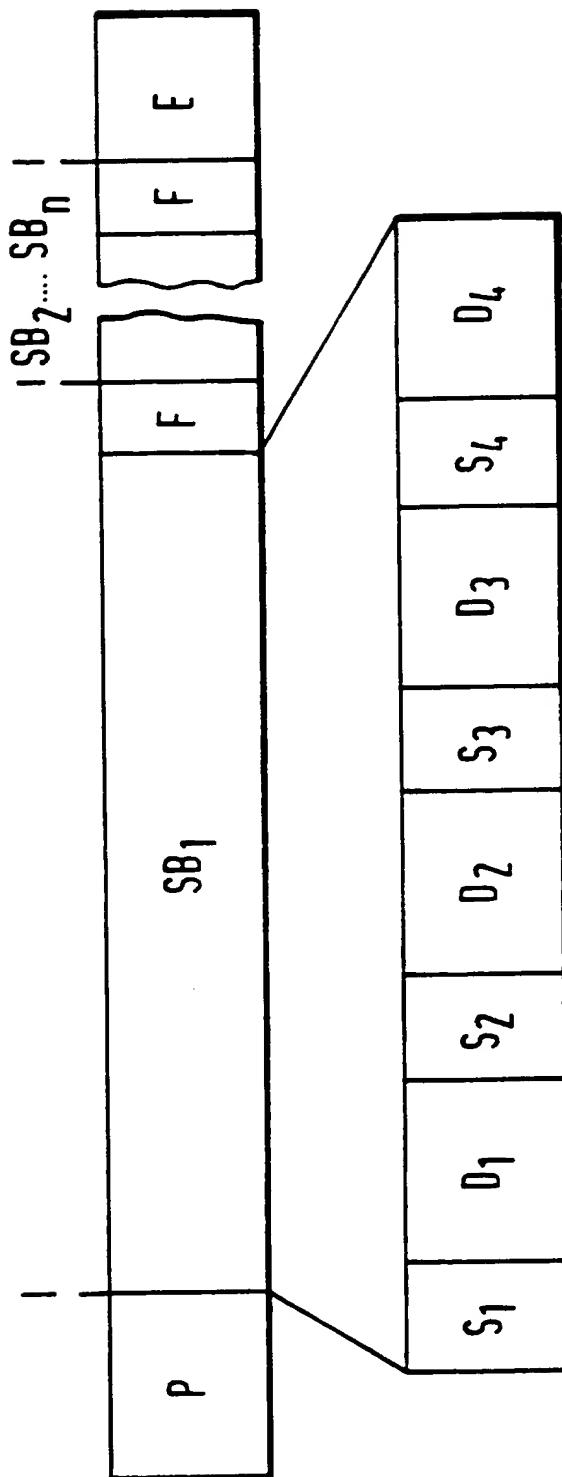


FIG. 15

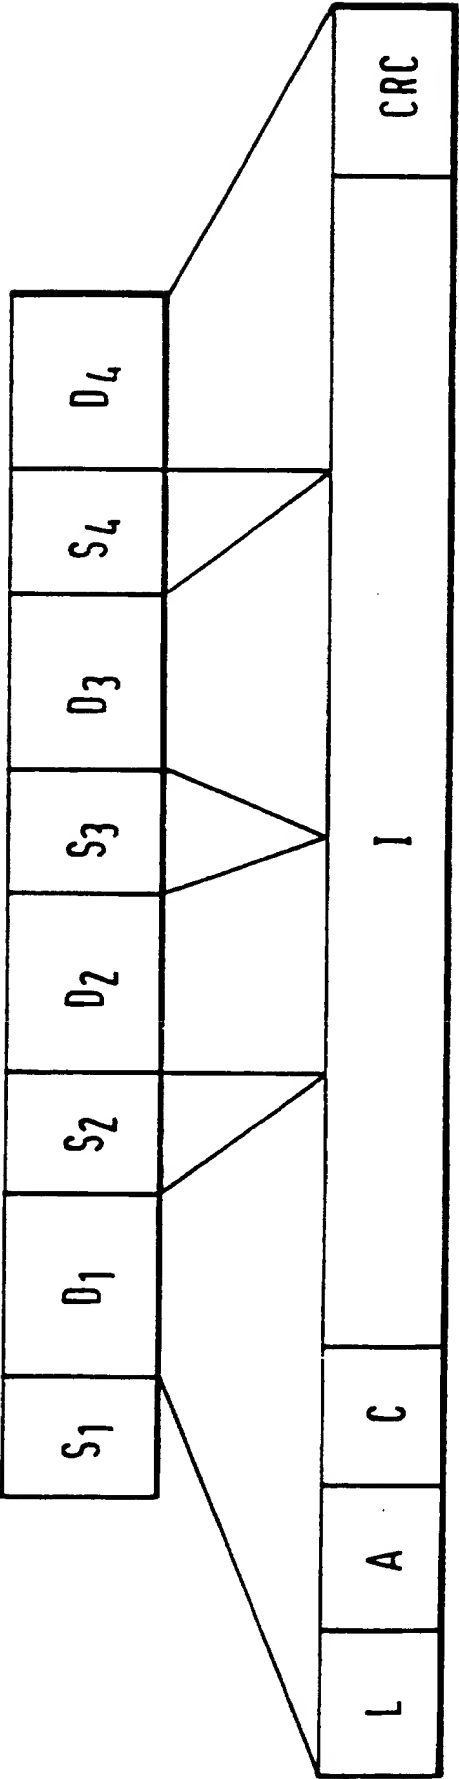


FIG. 16


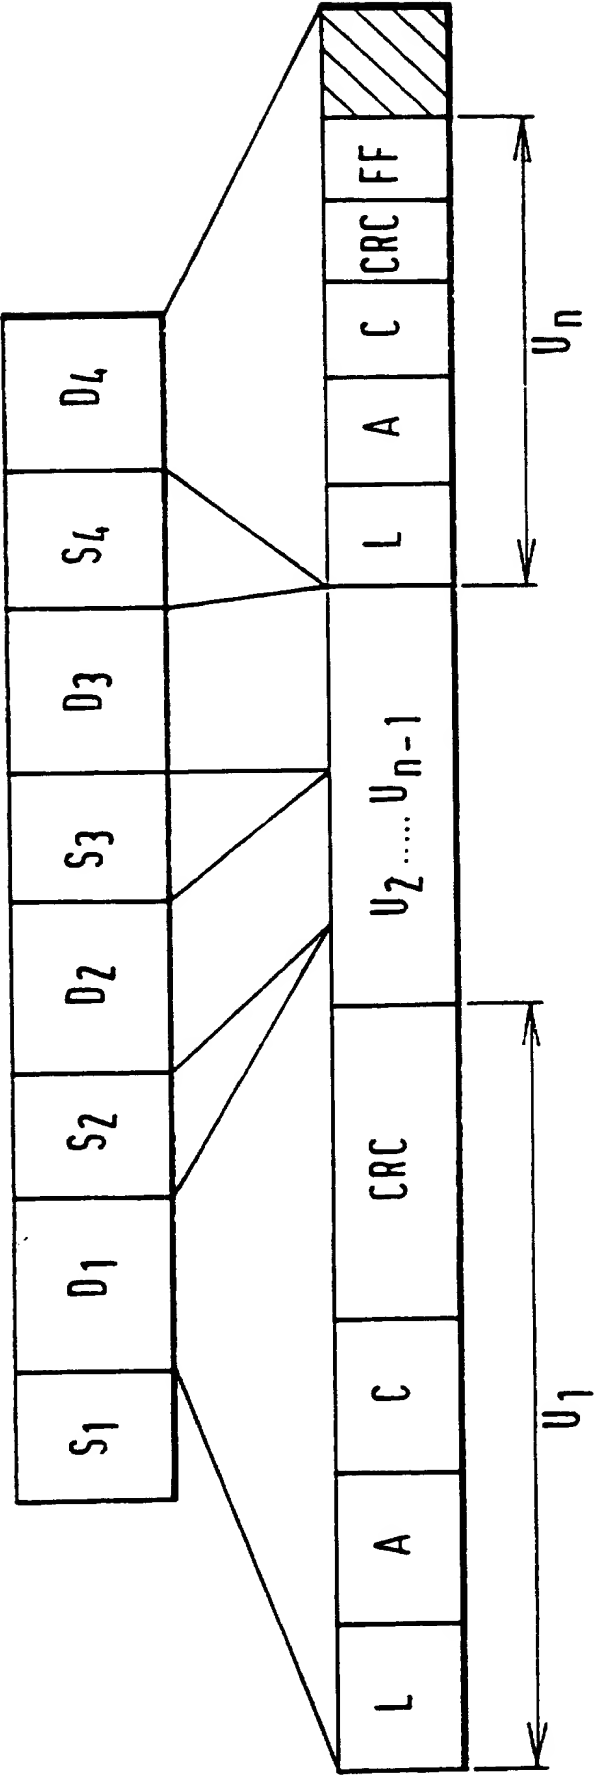


FIG. 17




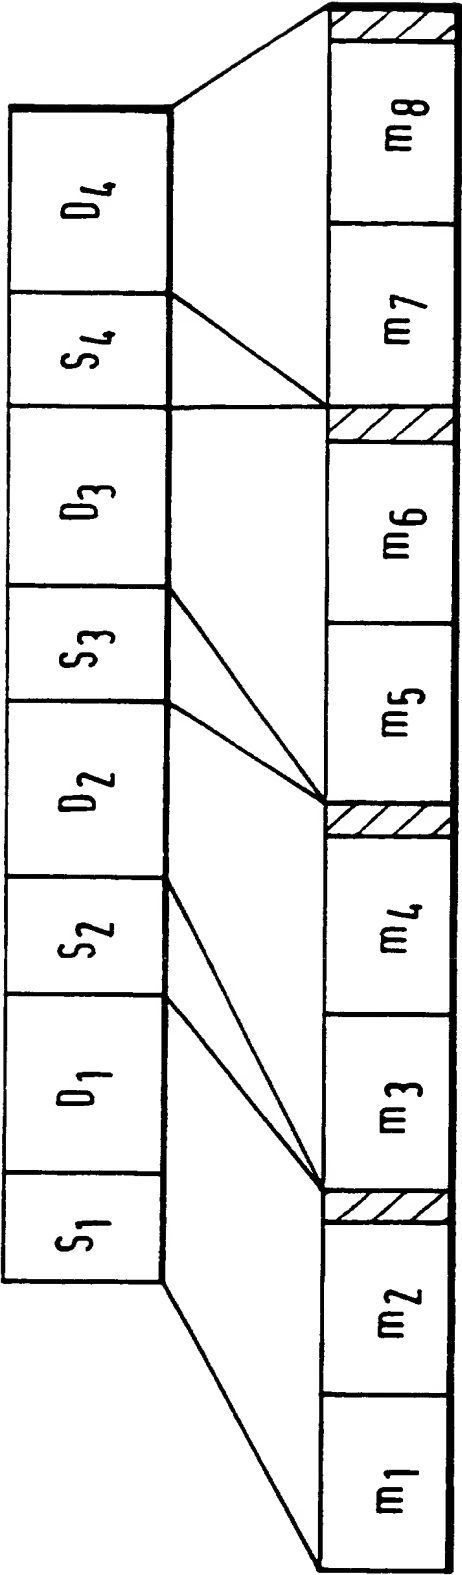

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 29/06</b>		<b>A3</b>	(11) International Publication Number: <b>WO 96/31040</b>
			(43) International Publication Date: 3 October 1996 (03.10.96)
(21) International Application Number: <b>PCT/GB96/00751</b>		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 March 1996 (29.03.96)			
(30) Priority Data: 9506759.1      31 March 1995 (31.03.95)      GB			
(71) Applicant (for all designated States except US): INTERNATIONAL MOBILE SATELLITE ORGANIZATION [-/GB]; 99 City Road, London EC1Y 1AX (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): FELDMAN, Howard, Ray [US/GB]; 82 Alicia Gardens, Kenton, Middlesex HA3 8JE (GB). KAWAI, Nobuyuki [JP/GB]; 19 Willow Way, Finchley, London N3 2PL (GB). SMITH, Richard, Douglas, Lane [GB/GB]; 380 Pickersleigh Road, Malvern, Worcestershire WR14 2QH (GB). REMAEL, François-Arnaud [FR/FR]; 2, rue Saint Yves, F-22300 Lannion (FR).			
(74) Agents: MUSKER, David, C. et al.; R.G.C. Jenkins & Co., 26 Caxton Street, London SW1H 0RJ (GB).		<p><b>Published</b>  <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p>(88) Date of publication of the international search report: 6 March 1997 (06.03.97)</p>	

(54) Title: DATA COMMUNICATION METHOD AND APPARATUS

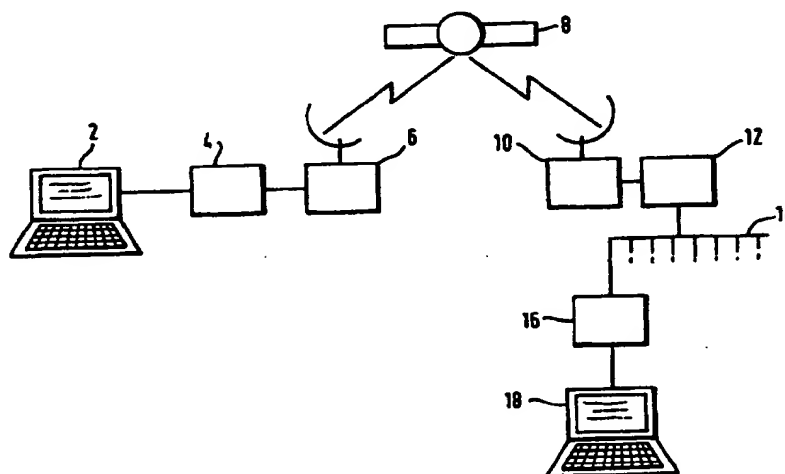

## (57) Abstract

An interface (4; 12) between a data terminal (2; 18) and a digital communications link (6, 8, 10) implements protocols and frame formats designed to reduce delays in a data communication with a remote terminal (18; 2). The interface (4; 12) overcomes the need to send or receive an HDLC SABME or UA control signal, and allows data to be sent over the digital communications link (6, 8, 10) as soon as the communication parameters are established. In a non-ARQ (error correction) mode, the interface (4; 12) sends control signals and data over the communications link (6, 8, 10) in frames subdivided into many small subframes of fixed length, each subframe having a length code. The interface (12), when arranged for connection to the data terminal (18) through a telephone network (14), encodes call progress signals from the telephone network (14) for sending over the digital communications link (6, 8, 10). The interface (4; 12) encodes and decodes interrupt signals for sending between the data terminal (2; 18) and the digital communications link (6, 8, 10) when an interrupt signal is detected.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

# INTERNATIONAL SEARCH REPORT

National Application No  
PCT/GB 96/00751

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 995 076 A (JOFFE DANIEL M ET AL) 19 February 1991  see column 1, line 42 - column 3, line 11 ---	7-10,13, 20-23, 26-28
A	US 4 985 895 A (PELKEY GARY L) 15 January 1991  see column 1, line 13 - column 2, line 35 ---	1,2, 13-15, 26-28
A	US 4 601 035 A (MARZEC RICHARD P ET AL) 15 July 1986 see column 1, line 6 - column 2, line 5 see column 8, line 10 - column 9, line 45 ---	1,2,14, 15
A	EP 0 503 207 A (IBM) 16 September 1992  see figures 1,2,4,7,8 ---	1,2,14, 15
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*&\* document member of the same patent family

Date of the actual completion of the international search

23 January 1997

Date of mailing of the international search report

30.01.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Goossens, A

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 96/00751

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 922 487 A (EILENBERGER GERT ET AL) 1 May 1990 see column 2, line 7 - line 53 ---	5,6,18, 19
A	US 4 926 416 A (WEIK HARTMUT) 15 May 1990  see column 3, line 43 - column 4, line 55 see figures 1-3 ---	5,6,18, 19
A	US 4 307 461 A (BRICKMAN NORMAN F ET AL) 22 December 1981 see column 5, line 55 - column 8, line 4 ---	11,12, 24,25
A	US 3 825 899 A (HAEBERLE H ET AL) 23 July 1974 see column 5, line 1 - column 7, line 2 -----	11,12, 24,25



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 96/ 00751

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see annexed sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/210

1. Claims 1-4,14-17 and 13,26-28: as far as relating to this subject:  
A method or apparatus for operating a data communications interface in which a connection control signal is received from a digital radio frequency communications link and in which data is sent in response to receipt of a said signal.
2. Claims 5,6,18,19 and 13,26-28 as far as relating to this subject:  
A method or apparatus for operating a data communications interface in which a signal is transmitted to a digital radio frequency communications link in a format comprising frames and subframes having a constant frame length.
3. Claims 7-10,20-23 and 13, 26-28 as far as relating to this subject:  
A method or apparatus for operating a communications interface connected between a telephone network and a digital communications link in which a call progress signal is received from the telephone network.
4. Claims 11,12,24,25 and 13,26-28 as far as relating to this subject:  
A method or apparatus for operating a data communications interface between a data terminal and a digital radio frequency communications link in which an interrupt indication is received from the data terminal.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/00751

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4995076	19-02-91	US-A- 5060259	22-10-91
US-A-4985895	15-01-91	NONE	
US-A-4601035	15-07-86	AU-B- 570731	24-03-88
		AU-A- 3393184	23-04-85
		CA-A- 1223650	30-06-87
		DE-A- 3469332	17-03-88
		EP-A- 0158645	10-02-88
		JP-T- 61500142	23-01-86
		WO-A- 8501627	11-04-85
EP-A-0503207	16-09-92	CA-A- 2062617	14-09-92
		JP-A- 6030079	04-02-94
		JP-B- 7020164	06-03-95
		US-A- 5323392	21-06-94
US-A-4922487	01-05-90	DE-A- 3742941	06-07-89
		AU-A- 2652688	22-06-89
		CA-A- 1337362	17-10-95
		CN-A- 1034648	09-08-89
		DE-D- 3885583	16-12-93
		EP-A- 0320714	21-06-89
		ES-T- 2048190	16-03-94
		JP-A- 2002767	08-01-90
		JP-B- 7028311	29-03-95
		KR-B- 9604717	12-04-96
US-A-4926416	15-05-90	DE-A- 3742939	06-07-89
		AU-A- 2668588	22-06-89
		CA-A- 1330119	07-06-94
		CN-A- 1035927	27-09-89
		DE-D- 3888480	21-04-94
		EP-A- 0320772	21-06-89
		ES-T- 2052679	16-07-94
		JP-A- 2004054	09-01-90
		JP-B- 7028314	29-03-95
		KR-B- 9607670	08-06-96
		NO-C- 173680	12-01-94

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International Application No.

PCT/GB 96/00751

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4307461	22-12-81	JP-A- 56147529	16-11-81
US-A-3825899	23-07-74	AU-B- 463612	31-07-75
		AU-A- 4548572	14-02-74
		BE-A- 787524	01-12-72
		CA-A- 1008567	12-04-77
		CA-A- 981817	13-01-76
		DE-A- 2239016	22-02-73
		FR-A- 2150777	13-04-73
		GB-A- 1395515	29-05-75
		NL-A- 7210918	13-02-73
		SE-B- 395582	15-08-77
		SE-B- 395097	25-07-77
		SE-A- 7506019	27-05-75